

# serie K3i Printer



## Indicator with integrated printer K3i Printer



- Indicator made of stainless steel with built-in thermal printer.
- Input for barcode scanner.
- Memory of 100 articles with alphanumeric code.
- Very bright multicolor LCD display.
- Weight check function (HI/OK/LO) with display in 3 bright colors.
- Zero memory for weighing tanks and silos.
- Dosage program by percentage in 3 levels.
- Four levels of Auto hold for large objects.
- Automatic, normal or fixed tare.
- 20 tare value memorisations. counting.
- Account counting function.
- Rechargeable battery.



### PRINTING OF TICKETS

- Alphanumeric product code printing. Entry of product codes by scanner, or manually with memory for 100 articles.
- Ticket printing with successive.
- Printing of batch.
- Print date and time.
- Net / gross weight printing, tare and pieces.
- Heavy accumulation printing.
- Customizable ticket header and footer.



3 customizable header lines.


Date, time, lot number and ticket number.

Product code. heavy balancing etc.

2 customizable farewell lines.

### Classification of products

The multicolor display allows you to easily classify weights with color indication. You can set the green color for the target weight (OK) red for HI and the yellow for Lo.

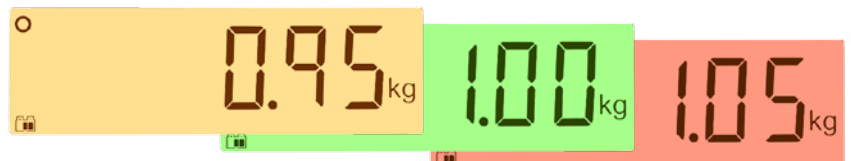

#### Clear easy-to-read display

The K3 Series has a multicolor LCD display with very bright internal lighting. It also includes a backlight auto-disconnect feature to extend battery life.

#### Intuitive use keyboard

Its keyboard with cross cursor simplifies the navigation by the menus and the configuration of the balance.

#### Available options

- Relay output.
- Wireless output.
- External tare push-button output
- Double data output, printer and RS 232-C.
- Printer PR3 and PR3-W.
- Remote displays RD3 and RD3-W.
- Software for PC Virtual Key.
- Tare pedal.
- Wall / column support, swingarm

#### Technical specifications

Power supply : 230 V/50 Hz 12 V AC  
 Battery , Service time 30/60 hours  
 Working temperature : +5°C /+35°C

### Technical characteristics

Model	K3i Printer
Reference	60960
Scope and divisions	Doble rango / 100.000 div. no OIML
A/D converter	24 Bits
Calibration weight	Seleccionable
Amounts available for introduccion of the sample in counting	10, 25, 50, 100, according to choice
Units of weighing	g (kg), lb, oz/lb
Interface	RS 232-C y TTL
Indicator material	Acero inoxidable
Protección	IP-54
Dimensions of the indicator (mm)	220 x 190 x 115
total weight (kg)	2.7

### Dimensiones exteriores (mm)

