


series TORTUGA




Tortuga series. Its strong structure makes it perfect for all kind of weighing.

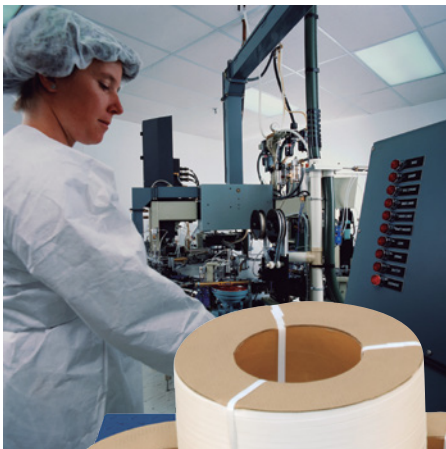

- Robust and precise floor scale thanks to its four load cells.
- Epoxy painted steel platform.
- Three platform sizes (800x800, 1000x800 and 1000x1000).
- Painted steel version with OIML C3 class load cells.
- Stainless steel version with stainless steel load cells.

Available in painted steel and stainless steel version.

Tortuga Series is available in painted steel version and AISI 304 stainless steel for the most aggressive environments.

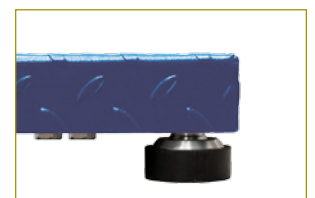

Adjustable feet

The adjustable feet allow leveling the platform despite possible irregularities in the floor; they also ensure an optimal force transmission to the load cells.

Principal functions

The low profile platform **Tortuga** is perfectly suitable for all types of applications: production, logistics, shipping, etc. Available in three sizes to adapt to your business: 800x800, 1000x800 and 1000x1000mm.

Available in two versions: painted steel and AISI 304 stainless steel version.

Painted steel version guarantees a high resistance thanks to its epoxy treatment, which makes it suitable for both dry and slightly humid environments. Its surface is resistant to acids, bumps and scratches. Equipped with Gram H8C Rebel C3 load cells, valid for legal metrology.

Stainless steel version is equipped with Gram B8D Rebel load cells, also made of stainless steel. Its integral stainless steel construction guarantees high resistance in aggressive environments: abundant water, high salinity, use of acids, detergents.

If you need a customized product, with special sizes, different readability than standard model, platform colour which pleases you, other thickness of the pan, etc....Everything is possible, Gram Precision will help you to find solutions.



Four load cells

The Tortuga serie has four load cells, one in each corner that provides more accuracy in weighing process.

Available options

- CS-1 column
- Connection cable extension
- Epoxy painted steel access ramp
- Integral pit frame installation available for all models except XTiger-2015
- Platen frame
- Stainless steel wall support
- Indicators in Legal Metrology: K2, K2E, K2N, K2EN, K2P and K4i.
- Indicators for internal use: K3, K3i, K1, K5i, IVP, IKP and SC2.
- PR3/PR3-W printers..
- RD3/RD3-W remote indicator.

Technical specifications

Power: 230 V/50 Hz (Euro) 11 V AC
Operation temperature: +5°C /+35°C

Technical features

Model	Tortuga SL-300	Tortuga SL-600	Tortuga ML-600	Tortuga GL-600	Tortuga SLI-300	Tortuga SLI-600	Tortuga GLI-600
Reference	60084	60085	6643	6644	60926	60927	60925
Capacity	300 kg	600 kg			300 kg	600 Kg	
Readability	50 g	100 g			50 g	100 g	
Structure	Painted steel				Stainless steel		
Load cells	H8C Rebel C3 Cells				B8D Rebel Stainless steel Cells		
Junction box	ABS con protección IP-67						
Useful size (mm)	800 x 800		800 x 1000	1000 x 1000	800 x 800		1000 x 1000
Minimal height (mm)	105						
Maximal height (mm)	140						
Total net weight (kg)	45	45	47	49	45	45	49

External dimensions (mm)

