

ROYAL WOOD

(100mm×900mm plank)

category: solid vinyl tile

ROYAL WOOD is TOLI's wood-look solid vinyl tile range that has variety of sizes and authentic designs. Green product with "ECO Mark"-certified.



Specification	overall thickness others	3.0mm Surface Clear Wear Layer 0.3mm / Round-Beveled	size 100mm×900mm
Packing	30pcs/box = 2.70m ² /box	Dimension	W 108mm × L 908mm × H 98mm
Net Weight			14.0kg/box
Performance	Wear Resistance	(EN649) Group T	
Recommended Adhesive from TOLI	dried mortar and concrete humid mortar and concrete	Eco AR600 Epo Gray ST, US Cement, US Cement (less-smelly), US200, US300T	
Notes on Installation	♦For one week after installation, direct sunlight, sudden change of temperature due to air conditioning, and water washing should be avoided. ♦The color shading differs on a tile-by-tile basis, which will make the floor look very natural when the tiles are installed.		
Recommended Maintenance Wax from TOLI	New FB Wax, U Wax, T Wax (Non-shiny & Antibacterial)		
Custom Order	If you ask for a different size or wear layer, please contact TOLI sales rep.		
Others	♦Please be aware that some rubber casters might cause color-contamination. ♦Please note that the product has the indigenous odor from its materials.		

MADE IN JAPAN



PWT3223



Based on intensive research on authentic texture of natural stones and wood-grains, realistic natural tones have been reproduced.
The color number marked with ♦ has a **Natural Tone** pattern.



PWT3220



♦ OAK



PWT3225

♦ OAK



PWT3244

♦ OAK



▲ PWT3244

ROYAL WOOD

(100mm×900mm plank)

category: solid vinyl tile

TOLI



PWT3246 OAK



PWT3247 ASH



PWT3248 ASH



PWT3268 MAPLE



PWT3269 MAPLE



PWT3276 OAK



PWT3316 BIRCH



PWT3317 PINE



▲ PWT3244



▲ PWT3317

Round-Beveling will make the floor much more natural.

•R-chamfer processing




Thanks to the new chamfer processing, floor covering, including the chamfer part, look as natural and vivid as the wood.

■TYPE OF BEVELING

ROUND-BEVELING

Finish the beveling with a rounded shape. Authentic wood texture can be created on the beveled part as well.




FINE BEVELING

Finish the beveling only on the surface clear wear layer. Beveled lines do not stand out and a high-end image can be conveyed.




REGULAR BEVELING

Finish the beveling through to the backing layer. Beveled lines are clearly visible.



NO BEVELING

As the edge of a tile is not beveled, the joints will look flat and simple after the installation.



ROYAL WOOD & REAL DECO

4 colors from ROYAL WOOD (100mm×900mm plank) can be exactly coordinated with TOLI wall covering REAL DECO.

ROYAL WOOD	REAL DECO
PWT3244	WRW8286
PWT3245	WRW8301
PWT3247	WRW8300
PWT3248	WRW8285

ROYAL WOOD

(150mm×900mm plank)

category: solid vinyl tile

ROYAL WOOD is TOLI's wood-look solid vinyl tile range that has variety of sizes and authentic designs. Green product with "ECO Mark"-certified.



Specification	overall thickness others	3.0mm Surface Clear Wear Layer 0.3mm / Round-Beveled	size 150mm×900mm		
Packing	20pcs/box = 2.70m ² /box	Dimension	W 162mm × L 920mm × H 68mm		
Net Weight		14.0kg/box			
Performance	Wear Resistance	(EN649) Group T			
Recommended Adhesive from TOLI	dried mortar and concrete	Eco AR600			
	humid mortar and concrete	Epo Gray ST, US Cement, US Cement (less-smelly), US200, US300T			
Notes on Installation	<p>♦For one week after installation, direct sunlight, sudden change of temperature due to air conditioning, and water washing should be avoided.</p> <p>♦The color shading differs on a tile-by-tile basis, which will make the floor look very natural when the tiles are installed.</p>				
Recommended Maintenance Wax from TOLI	New FB Wax, U Wax, T Wax (Non-shiny & Antibacterial)				
Custom Order	If you ask for a different size or wear layer, please contact TOLI sales rep.				
Others	<p>♦Please be aware that some rubber casters might cause color-contamination.</p> <p>♦Please note that the product has the indigenous odor from its materials.</p>				

MADE IN JAPAN



PWT3219



Based on intensive research on authentic texture of natural stones and wood-grains, realistic natural tones have been reproduced.
The color number marked with ♦ has a **Natural Tone** pattern.



PWT3204



PWT3205



PWT3206



PWT3207



PWT3211



PWT3212



▲ PWT3205

ROYAL WOOD

(150mm×900mm plank)

category: solid vinyl tile

TOLI



Vinyl
Tile



▲ PWT3216



▲ PWT3219/PWT3221/PWT3224/PWT3229

ROYAL WOOD (150mm×900mm plank) / vinyl tile

ROYAL WOOD

(150mm×900mm plank)

category: solid vinyl tile

ROYAL WOOD is TOLI's wood-look solid vinyl tile range that has variety of sizes and authentic designs. Green product with "ECO Mark"-certified.



Specification	overall thickness others	3.0mm Surface Clear Wear Layer 0.3mm / Round-Beveled	size 150mm×900mm
Packing	20pcs/box = 2.70m ² /box	Dimension	W 162mm × L 920mm × H 68mm
Net Weight		14.0kg/box	
Performance	Wear Resistance	(EN649) Group T	
Recommended Adhesive from TOLI		See page 250.	
Notes on Installation		See page 250.	
Recommended Maintenance Wax from TOLI		See page 250.	
Custom Order		See page 250.	
Others		See page 250.	

MADE IN JAPAN

PWT3236 ◆ OAKPWT3237 ◆ OAKPWT3238 ◆ OAKPWT3239 ◆ OAKPWT3240 ◆ OAKPWT3241 OAKPWT3242 OAKPWT3243 OAK

Based on intensive research on authentic texture of natural stones and wood-grains, realistic natural tones have been reproduced.
The color number marked with ◆ has a Natural Tone pattern.



▲ PWT3241

ROYAL WOOD

(150mm×900mm plank)

category: solid vinyl tile

TOLI



ROYAL WOOD & REAL DECO & HARDEC

9 colors from ROYAL WOOD (150mm×900mm plank) can be exactly coordinated with TOLI wall covering REAL DECO and HARDEC.

ROYAL WOOD	REAL DECO	HARDEC
PWT3206	WRW8221	—
PWT3207	WRW8222	—
PWT3242	WRW8302	DEC8302
PWT3243	WRW8304	DEC8304
PWT3258	WRW8354	—
PWT3259	WRW8355	—
PWT3260	WRW8363	—
PWT3277	WRW8264	DEC8264
PWT3278	WRW8265	DEC8265



▲ PWT3256

ROYAL WOOD

(150mm×900mm plank)

category: solid vinyl tile

ROYAL WOOD is TOLI's wood-look solid vinyl tile range that has variety of sizes and authentic designs. Green product with "ECO Mark"-certified.



Specification	overall thickness others	3.0mm Surface Clear Wear Layer 0.3mm / Round-Beveled	size 150mm×900mm
Packing	20pcs/box = 2.70m ² /box	Dimension	W 162mm × L 920mm × H 68mm
Net Weight		14.0kg/box	
Performance	Wear Resistance	(EN649) Group T	
Recommended Adhesive from TOLI		See page 250.	
Notes on Installation		See page 250.	
Recommended Maintenance Wax from TOLI		See page 250.	
Custom Order		See page 250.	
Others		See page 250.	

MADE IN JAPAN



PWT3273

◆ OAK



PWT3274

◆ OAK



PWT3275



PWT3277

ZEBRAWOOD



PWT3278

ZEBRAWOOD



PWT3279

ACACIA



PWT3280

ACACIA



PWT3288

OAK



Based on intensive research on authentic texture of natural stones and wood-grains, realistic natural tones have been reproduced.
The color number marked with ◆ has a Natural Tone pattern.



▲ PWT3273/PST3087 (ROYAL STONE · page 241)/
PST3088 (ROYAL STONE · page 219)/PST3089 (ROYAL STONE · page 230)

ROYAL WOOD

(150mm×900mm plank)

category: solid vinyl tile

TOLI



PWT3289



OAK



PWT3303



PWT3304



PWT3305



PWT3308



PWT3309



PWT3312



PWT3313



PWT3314

PINE



PWT3318

CHERRY



PWT3319

CHERRY



PWT3320

CEDAR



▲ PWT3309



▲ PWT3313

ROYAL WOOD

(180mm×1260mm plank)

category: solid vinyl tile

ROYAL WOOD is TOLI's wood-look solid vinyl tile range that has variety of sizes and authentic designs. Green product with "ECO Mark"-certified.



Specification	overall thickness others	3.0mm Surface Clear Wear Layer 0.3mm / Round-Beveled	size 180mm×1260mm
Packing	12pcs/box = 2.72m ² /box	Dimension	W 193mm × L 1284mm × H 50mm
Net Weight		15.1kg/box	
Performance	Wear Resistance	(EN649) Group T	
Recommended Adhesive from TOLI	dried mortar and concrete humid mortar and concrete	Eco AR600 Epo Gray ST, US Cement, US Cement (less-smelly), US200, US300T	
Notes on Installation	♦For one week after installation, direct sunlight, sudden change of temperature due to air conditioning, and water washing should be avoided. ♦The color shading differs on a tile-by-tile basis, which will make the floor look very natural when the tiles are installed.		
Recommended Maintenance Wax from TOLI	New FB Wax, U Wax, T Wax (Non-shiny & Antibacterial)		
Custom Order	If you ask for a different size or wear layer, please contact TOLI sales rep.		
Others	♦Please be aware that some rubber casters might cause color-contamination. ♦Please note that the product has the indigenous odor from its materials.		

MADE IN JAPAN



Based on intensive research on authentic texture of natural stones and wood-grains, realistic natural tones have been reproduced.
The color number marked with ♦ has a **Natural Tone** pattern.



PWT3213 ♦ OAK



PWT3214 ♦ OAK



PWT3249 ♦ WALNUT




PWT3261 ♦ CHERRY



PWT3262 ♦ CHERRY



PWT3263 ♦ CHERRY

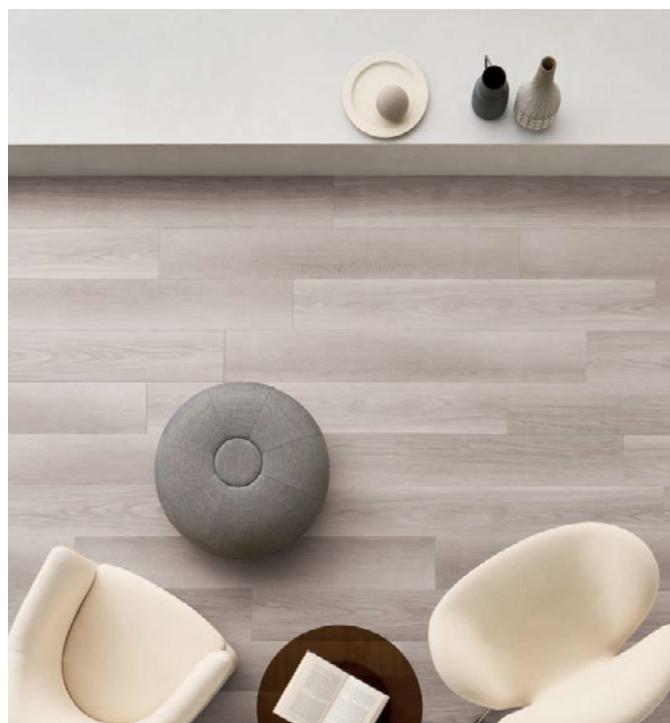

▲ PWT3281

ROYAL WOOD

(180mm×1260mm plank)

category: solid vinyl tile

TOLI



▲ PWT3284



▲ PWT3310

ROYAL WOOD HIGH-END (228.6mm×1422.4mm plank)

category: solid vinyl tile

ROYAL WOOD is TOLI's wood-look solid vinyl tile range that has variety of sizes and authentic designs.



Specification	overall thickness others	3.0mm Surface Clear Wear Layer 0.3mm / Fine-Beveled	size 228.6mm×1422.4mm
Packing	8pcs/box = 2.60m ² /box	Dimension	W 241mm × L 1442mm × H 32mm
Net Weight		15.5kg/box	
Performance	Wear Resistance	(EN649) Group T	
Recommended Adhesive from TOLI	dried mortar and concrete humid mortar and concrete	Eco AR600 Epo Gray ST, US Cement, US Cement (less-smelly), US200, US300T	
Notes on Installation	♦For one week after installation, direct sunlight, sudden change of temperature due to air conditioning, and water washing should be avoided. ♦The color shading differs on a tile-by-tile basis, which will make the floor look very natural when the tiles are installed.		
Recommended Maintenance Wax from TOLI		New FB Wax, U Wax, T Wax (Non-shiny & Antibacterial)	
Others	♦Please be aware that some rubber casters might cause color-contamination. ♦Please note that the product has the indigenous odor from its materials.		



Based on intensive research on authentic texture of natural stones and wood-grains, realistic natural tones have been reproduced.
The color number marked with ♦ has a **Natural Tone** pattern.



PWT3208



PWT3292

♦ OAK



PWT3209

♦ OAK




PWT3293

♦ OAK



PWT3210

♦ OAK

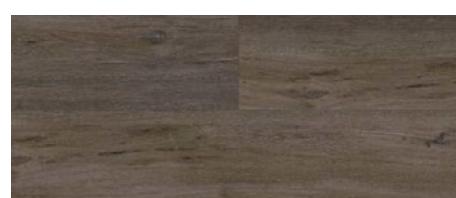

PWT3294

♦ OAK

ROYAL WOOD HIGH-END (75mm×450mm mini-plank)

category: solid vinyl tile

ROYAL WOOD is TOLI's wood-look solid vinyl tile range that has variety of sizes and authentic designs. Green product with "ECO Mark"-certified.



Specification	overall thickness 3.0mm	size 75mm×450mm	
	others Surface Clear Wear Layer 0.3mm / Round-Beveled		
Packing	84pcs/box = 2.83m ² /box	Dimension W 465mm × L 475mm × H 55mm	
Net Weight	14.7kg/box		
Recommended Adhesive from TOLI	Wear Resistance	(EN649) Group T	
	dried mortar and concrete	Eco AR600	
	humid mortar and concrete	Epo Gray ST, US Cement, US Cement (less-smelly), US200, US300T	
Notes on Installation	<ul style="list-style-type: none"> For one week after installation, direct sunlight, sudden change of temperature due to air conditioning, and water washing should be avoided. The color shading differs on a tile-by-tile basis, which will make the floor look very natural when the tiles are installed. 		
Recommended Maintenance Wax from TOLI	New FB Wax, U Wax, T Wax (Non-shiny & Antibacterial)		
Others	<ul style="list-style-type: none"> Please be aware that some rubber casters might cause color-contamination. Please note that the product has the indigenous odor from its materials. 		

MADE IN JAPAN



Based on intensive research on authentic texture of natural stones and wood-grains, realistic natural tones have been reproduced.
The color number marked with ♦ has a Natural Tone pattern.



▲ PWT3285



■ PWT3217

♦ OAK



■ PWT3250

♦ WALNUT



■ PWT3285

♦ OAK

ROYAL WOOD (450mm square)

category: solid vinyl tile

ROYAL WOOD is TOLI's wood-look solid vinyl tile range that has variety of sizes and authentic designs. Green product with "ECO Mark"-certified.



Specification	overall thickness others	3.0mm Surface Clear Wear Layer 0.3mm	size 450mm×450mm
Packing	14pcs/box = 2.83m ² /box	Dimension	W 462mm × L 473mm × H 51mm
Net Weight		14.7kg/box	
Performance	Wear Resistance	(EN649) Group T	
Recommended Adhesive from TOLI	dried mortar and concrete humid mortar and concrete	Eco AR600 Epo Gray ST, US Cement, US Cement (less-smelly), US200, US300T	
Way of Installation			Quater Turn
Notes on Installation	♦Before installation, make sure the arrow marks on the back of each tile, which show the direction of the pattern. ♦For one week after installation, direct sunlight, sudden change of temperature due to air conditioning, and water washing should be avoided. ♦The color shading differs on a tile-by-tile basis, which will make the floor look very natural when the tiles are installed.		
Recommended Maintenance Wax from TOLI	New FB Wax, U Wax, T Wax (Non-shiny & Antibacterial)		
Custom Order	If you ask for a different size or wear layer, please contact TOLI sales rep.		
Others	♦Please be aware that some rubber casters might cause color-contamination. ♦Please note that the product has the indigenous odor from its materials.		

MADE IN JAPAN



PWT3307



PWT3306
PARQUET



PWT3307
PARQUET



PWT3322
CANE



Based on intensive research on authentic texture of natural stones and wood-grains, realistic natural tones have been reproduced.
The color number marked with ♦ has a Natural Tone pattern.



▲ PWT3306

ROYAL WOOD GRAND (600mm square)

category: solid vinyl tile

Authentic registered-embossed pattern in large 600mm × 600mm size.



Specification	overall thickness	3.0mm	size	600mm×600mm					
	others	Surface Clear Wear Layer 0.5mm / Fine-Beveled							
Packing	10pcs/box = 3.60m ² /box		Dimension	W 612mm × L 623mm × H 37mm					
Net Weight	21.5kg/box								
Performance	Wear Resistance		(EN649) Group T						
Recommended Adhesive from TOLI	dried mortar and concrete	Eco AR600							
	humid mortar and concrete	Epo Gray ST, US Cement, US Cement (less-smelly), US200, US300T							
Notes on Installation	<ul style="list-style-type: none"> ◆ Before installation, make sure the arrow marks on the back of each tile, which show the direction of the pattern. ◆ For one week after installation, direct sunlight, sudden change of temperature due to air conditioning, and water washing should be avoided. ◆ The color shading differs on a tile-by-tile basis, which will make the floor look very natural when the tiles are installed. 								
Recommended Maintenance Wax from TOLI	New FB Wax, U Wax, T Wax (Non-shiny & Antibacterial)								
Others	<ul style="list-style-type: none"> ◆ Please be aware that some rubber casters might cause color-contamination. ◆ Please note that the product has the indigenous odor from its materials. 								



▲ PWT3290



PWT3291



PWT3290
PARQUET



PWT3291
PARQUET

※4 different patterns are packed in one same box. Random installation of 4 patterns will create the image of authentic wood flooring.

ROYAL WOOD

HERRINGBONE

(457.2mm×914.4mm plank)

category: solid vinyl tile


ROYAL WOOD is TOLI's wood-look solid vinyl tile range that has variety of sizes and authentic designs.




Recycle



Specification	overall thickness others	3.0mm Surface Clear Wear Layer 0.3mm	size 457.2mm×914.4mm
Packing	8pcs/box = 3.34m ² /box	Dimension	W 470mm × L 935mm × H 30mm
Net Weight		19.8kg/box	
Performance	Wear Resistance	(EN649) Group T	
Recommended Adhesive from TOLI	dried mortar and concrete	Eco AR600	
	humid mortar and concrete	Epo Gray ST, US Cement, US Cement (less-smelly), US200, US300T	
Notes on Installation	♦Before installation, make sure the arrow marks on the back of each tile, which show the direction of the pattern. ♦For one week after installation, direct sunlight, sudden change of temperature due to air conditioning, and water washing should be avoided. ♦The color shading differs on a tile-by-tile basis, which will make the floor look very natural when the tiles are installed.		
Recommended Maintenance Wax from TOLI		New FB Wax, U Wax, T Wax (Non-shiny & Antibacterial)	
Others	♦Please be aware that some rubber casters might cause color-contamination. ♦Please note that the product has the indigenous odor from its materials.		

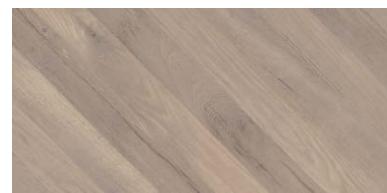

▲ PWT3287

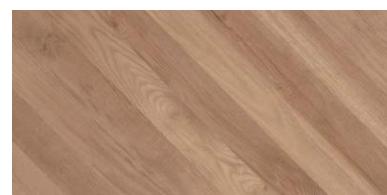

▲ PWT3287



TYPE A
(diagonally right up)



TYPE B
(diagonally right down)

4 tiles each for 2 different designs (A and B) are packed in one same box. On the joints of A and B, plank patterns are not strictly connected.

ROYAL WOOD MIRAGE (150mm×900mm plank)

category: solid vinyl tile

Within one same color, 2 different materials - wood and metal - are well designed. Part of its metallic pattern is using polarized ink.




Specification	overall thickness others	3.0mm Surface Clear Wear Layer 0.3mm / Round-Beveled	size 150mm×900mm
Packing	20pcs/box=2.70m ² /box	Dimension	W 162mm × L 920mm × H 68mm
Net Weight		14.0kg/box	
Performance	Wear Resistance	(EN649) Group T	
Recommended Adhesive from TOLI	dried mortar and concrete humid mortar and concrete	Eco AR600 Epo Gray ST, US Cement, US Cement(less-smelly), US200, US300T	
Notes on Installation	For one week after installation, direct sunlight, sudden change of temperature due to air conditioning, and water washing should be avoided. The color shading differs on a tile-by-tile basis. In case you do not feel comfortable about the floor after installation, please change the tiles partly so that it will look natural.		
Recommended Maintenance Wax from TOLI	New FB Wax U Wax T Wax (Non-shiny & Antibacterial)		
Custom Order	If you ask for a different size or wear layer, please contact TOLI sales rep.		
Others	Please be aware that some rubber casters might cause color-contamination. Please note that the product has the indigenous odor from its materials.		

MADE IN JAPAN



Based on intensive research on authentic texture of natural stones and wood-grains, realistic natural tones have been reproduced.
The color number marked with ♦ has a **Natural Tone** pattern.

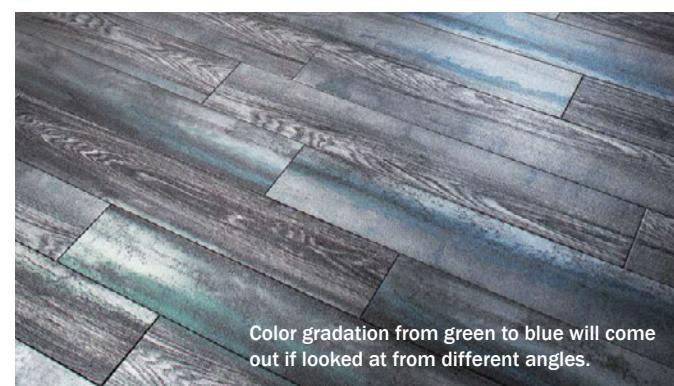

▲ PWT3276 (100mm×900mm · page 249)/PWT3203

ROYAL WOOD TETRA (trapezium)

category: solid vinyl tile

Unique parquet design where variety of patterns can be seen.
Green product with "ECO Mark"-certified.



Specification	overall thickness	3.0mm	size	trapezium					
	others	Surface Clear Wear Layer 0.3mm / Round-Beveled							
Packing	16pcs/box = 3.24m ² /box								
Net Weight	16.2kg/box								
Recommended Adhesive from TOLI	Wear Resistance	(EN649) Group T							
	dried mortar and concrete	Eco AR600							
	humid mortar and concrete	Epo Gray ST, US Cement, US Cement (less-smelly), US200, US300T							
Notes on Installation	<ul style="list-style-type: none"> ◆ For one week after installation, direct sunlight, sudden change of temperature due to air conditioning, and water washing should be avoided. ◆ The color shading differs on a tile-by-tile basis, which will make the floor look very natural when the tiles are installed. 								
Recommended Maintenance Wax from TOLI	New FB Wax, U Wax, T Wax (Non-shiny & Antibacterial)								
Custom Order	If you ask for a different size or wear layer, please contact TOLI sales rep.								
Others	<ul style="list-style-type: none"> ◆ Please be aware that some rubber casters might cause color-contamination. ◆ Please note that the product has the indigenous odor from its materials. ◆ Occasionally a very slight size difference could be seen between different production lots. For designed installation of 4-sides-beveled tiles, or installation of tiles with the shape of hexagon, trapezium and 900mm square, please adjust the size of a tile as needed. Otherwise joints should be finished with caulking compound. ◆ Please bear in mind that ROYAL WOOD (TETRA) may take more time for layout and installation compared to the tiles in square size. 								


MADE IN JAPAN



PWT3201



PWT3201



▲ PWT3201/PST3005 (ROYAL STONE - page 243)



Based on intensive research on authentic texture of natural stones and wood-grains, realistic natural tones have been reproduced.
The color number marked with ◆ has a Natural Tone pattern.

ROYAL WOOD HIGH-END (179mm hexagon)

category: solid vinyl tile

New version of popular hexagon tiles. Beautiful color shading is described in one same tile. Classy wood grain pattern with a mat-finished surface.



Specification	overall thickness	3.0mm	size	179mm hexagon			
	others	Surface Clear Wear Layer 0.3mm / Beveled					
Packing	36pcs/box = 2.99m ² /box		Dimension	W 372mm × L 643mm × H 68mm			
Net Weight	16.8kg/box						
Recommended Adhesive from TOLI	Wear Resistance	(EN649) Group T					
	dried mortar and concrete	Eco AR600					
	humid mortar and concrete	Epo Gray ST, US Cement, US Cement (less-smelly), US200, US300T					
Notes on Installation	<ul style="list-style-type: none"> ◆ For one week after installation, direct sunlight, sudden change of temperature due to air conditioning, and water washing should be avoided. ◆ The color shading differs on a tile-by-tile basis, which will make the floor look very natural when the tiles are installed. 						
Recommended Maintenance Wax from TOLI	New FB Wax, U Wax, T Wax (Non-shiny & Antibacterial)						
Others	<ul style="list-style-type: none"> ◆ Please be aware that some rubber casters might cause color-contamination. ◆ Please bear in mind that ROYAL WOOD (hexagon) may take more time for layout and installation compared to the tiles in square size. ◆ Please note that the product has the indigenous odor from its materials. ◆ Occasionally a very slight size difference could be seen between different production lots. For designed installation of 4-sides-beveled tiles, or installation of tiles with the shape of hexagon, trapezium and 900mm square, please adjust the size of a tile as needed. Otherwise joints should be finished with caulking compound. 						

MADE IN JAPAN



Based on intensive research on authentic texture of natural stones and wood-grains, realistic natural tones have been reproduced.
The color number marked with has a [Natural Tone](#) pattern.

The color number marked with ♦ has a **Natural Tone** pattern.



PWT3202




▲ PST3008/PST3009/PST3010 (ROYAL STONE · page 246)/PWT3202



PWT3202
OAK

<Dimension Details>



ROYAL WOOD NONS (150mm×900mm plank)

category: solid vinyl tile

LVT with excellent non-slippery performance.
Green product with "ECO Mark"-certified.



Specification	overall thickness	3.0mm	size	150mm×900mm
	others	Surface Clear Wear Layer 0.3mm / Round-Beveled		
Packing	20pcs/box = 2.70m ² /box	Dimension	W 162mm × L 920mm × H 68mm	
Net Weight		15.5kg/box		
Recommended Adhesive from TOLI	dried mortar and concrete		Eco AR600	
	humid mortar and concrete		Epo Gray ST, US Cement, US Cement (less-smelly), US200, US300T	
Notes on Installation	<ul style="list-style-type: none"> For one week after installation, direct sunlight, sudden change of temperature due to air conditioning, and water washing should be avoided. The color shading differs on a tile-by-tile basis, which will make the floor look very natural when the tiles are installed. 			
Recommended Maintenance Wax from TOLI	New FB Wax, U Wax, T Wax (Non-shiny & Antibacterial)			
Others	<ul style="list-style-type: none"> Please be aware that some rubber casters might cause color-contamination. Please note that the product has the indigenous odor from its materials. For the dirt and stains stuck on the surface, apply the neutral detergent and remove them by the brush with thin bristles. Afterwards clean with a vacuum cleaner, a wet rag wrung out tightly, or a mop. Before applying the wax for maintenance, buff the floor surface sufficiently with a blue pad. Please bear in mind that thick coating of wax will lessen non-slippery performance. If the slip-retardant effect to oil should be required, do not apply the wax on the surface. ROYAL WOOD NONS is for the place where you walk with your shoes on. Do not walk on it without your shoes on. The gloss levels on the 4 sides are not always even. Due to non-slippery finish of a tile, the surface of the furniture and fixtures facing the floor may be abraded faster. That depends on their materials. In the environment where oils always adhere to shoe soles, non-slip finish on the surface cannot perform well. 			

MADE IN JAPAN



Based on intensive research on authentic texture of natural stones and wood-grains, realistic natural tones have been reproduced.
The color number marked with ◆ has a **Natural Tone** pattern.



PWT3323 ◆ OAK
(Non-Slippery Finish of PWT3238)



PWT3324 ◆ OAK
(Non-Slippery Finish of PWT3240)



PWT3325 ◆ OAK
(Non-Slippery Finish of PWT3237)

※Non-slippery surface coating will cause bigger color difference compared to the difference between production batches.



▲ PWT3324

Slip Resistance

<in accordance with JIS A 1454 (OY-PULL method), rubber shoes>

	C.S.R. value	
	dry	wet and dusty
ROYAL WOOD NONS	0.66	0.46

We call "slip-resistant" for the products that can show sufficient non-slippery performance both in dry condition and in wet and dusty condition.