


LP45F 700

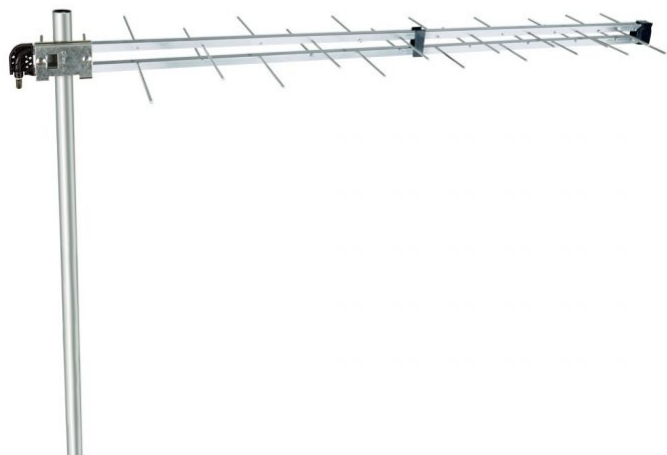

Log-periodic pre-assembled aerials for **UHF band** characterized by extremely easy connection due to the **F connector** being located near the mast clamp.

- Due to the specific mast clamp these aerials can be assembled in **vertical or horizontal polarisation without additional accessories**.
- **Geometrical** dipole distribution has been **redesigned** in order to obtain a good **5G and 4G LTE filtering**; Exclusively registered on Australian market.
- Black plastic parts.

CODE	216251	
Elements	no.	15+15
Band		UHF
Channel		E21-E48
Bandwidth	MHz	470-694
Gain	dBi	12.5
Front/Back ratio	dB	36
Return loss	dB	-15
Beamwidth (-3dB)	°	±25
Wind load at 120km/h (720N/m ²)	kg (N)	3.0 (29.43)
Connector	Type	F
Impedance	Ω	75
Max mast (Ø)	mm	60
Dimensions (L x H)	cm	115 x 32
Quantity Masterbox	pcs	30
Unit weight	kg	0.90
Total weight	kg	27.3

Accessories

Horizontal polarization	Included
Horizontal polarization Tilt adjustment	PV10 (210011)
Vertical polarization	Included
Vertical polarization Tilt adjustment	PV10 (210011)
Auxiliary boom	N.P.

GAIN **PATTERN**

