
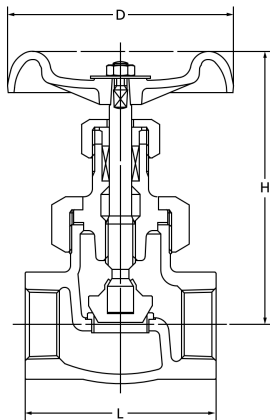


10K Globe Valve

10SP

U.B.I.S.

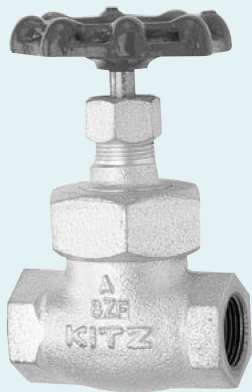

E-E dimension : JV 4-4*
 End threads : JIS B 0203
 *KITZ Std. for 3/8"

120°C Static water.....1.4MPa

220°C Steam, air, gas, oil.....1.2MPa

300°C Steam, air, gas, oil.....1.0MPa

- Use for lubricating or hydraulic oil is acceptable. Contact KITZ Corporation for technical advice, if valves are used as heat transfer media.
- Employment of copper gasket prohibits use of this valve for ammonia or amine chemicals.

Materials

Parts	JIS material
Body	FCD-5
Bonnet	FCD-5
Stem	SUS420J2
Disc	SUS403
Body seat ring	SUS403
Gland	SUS403 (1/2" & 3/4" : SUS420J2)
Gland packing	Non Asbestos Packing
Packing nut	FCD-5
Handwheel	FCD450
Wheel nut	SS400
Bonnet ring	FCD-5
Gasket	C1100P-0
Name plate	A1050P

Dimensions

Size	mm							
	mm inch	10 3/8	15 1/2	20 3/4	25 1	32 1 1/4	40 1 1/2	50 2
L		64	70	80	90	110	120	140
H (open)		107	125	125	145	162	180	198
D		60	80	80	100	115	115	135