













NVR9700SERIES

Intelligent NVR

8MP/6MP/5MP/4MP/3MP/1080P/960P/720P




 <p>8MP IPC Camera Support</p>	 <p>H.265S H.265+ Compression</p>	 <p>VCA</p>	 <p>HDMI Interface</p>	 <p>4K 4K Output</p>	 <p>STD</p>
 <p>USB Port</p>	 <p>ONVIF Support</p>	 <p>CMS Support</p>	 <p>Cloud(P2P)</p>	 <p>DDNS</p>	 <p>Mobile APP</p>

NVR9700SERIES

Intelligent NVR

8MP/6MP/5MP/4MP/3MP/1080P/960P/720P

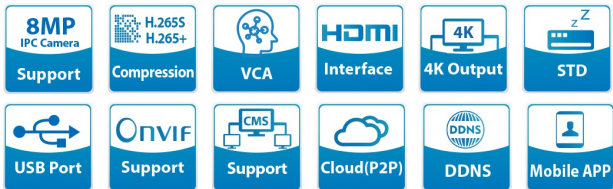

Feature

- * Compression Standard H.265 / H.264
- * Network Input 16 CH IPC input
- * Network Input 8MP / 6MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P / 960H / D1 / CIF
- * 2-way Audio RCA x 1
- * Frame Rate P:25fps; N:30fps
- * Interface RJ 45 1000Mbps x 1
- * HDD SATA3.0 x 2, max 8T per HDD
- * USB 2.0 x 2 / RS 485 x 2
- * Power Supply DC 12V/3A


Specification

Model	HP-9716-H2
Compression	Standard H.265 / H.264
OS	Embedded Linux
Video	
Network Input	16 CH IPC input
Network Input Resolution	8MP / 6MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P / 960H / D1 / CIF
Output	HDMI X 1: 3840x2160 / 1920x1080 / 1280x1024 / 1024x768 VGA: 1920x1080 / 1280x1024 / 1024x768
Audio	
Network Input	16 CH IPC audio input
2-way Audio	RCA x 1
Local Output	RCA x 1
Compression	G.711(U/A)
Live View	
Decoding Capability	1CH 8MP; 4CH 1080P
Record	
Record Stream	Dual stream recording
Resolution	8MP / 6MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P / 960H / D1 / CIF
Frame Rate	P:25fps; N:30fps
Playback	
Simultaneous Playback	Max. 16 CH
Search	Time slice / time / event / tag search
Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events
Function	Play, pause, FF, FB, digital zoom, etc.
Alarm	
Mode	Manual, sensor, motion, exception, smart events
Input	Support 4CH alarm input; Support IPC alarm input
Output	Support 1CH alarm output; Support IPC alarm output

NVR9700SERIES

Intelligent NVR

8MP/6MP/5MP/4MP/3MP/1080P/960P/720P

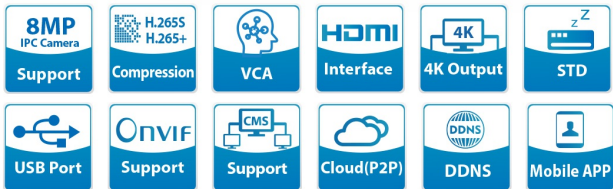

Feature

- * Compression Standard H.265 / H.264
- * Network Input 16 CH IPC input
- * Network Input 8MP / 6MP / 5MP / 4MP
3MP / 1080P / 960P / 720P / 960H / D1 / CIF
- * 2-way Audio RCA x 1
- * Frame Rate P:25fps; N:30fps
- * Interface RJ 45 1000Mbps x 1
- * HDD SATA3.0 x 2, max 8T per HDD
- * USB 2.0 x 2 / RS 485 x 2
- * Power Supply DC 12V/3A

Specification

Model	HP-9716-H2
Triggering	Record, snap, preset, e-mail, etc.
Network	
Interface	RJ 45 1000Mbps x 1
Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP
Access / Transfer Bandwidth	112/112 (Mbps)
Mobile Device	
OS	iOS, Andriod
Storage	
HDD	SATA3.0 x 2, max 8T per HDD
Backup	
Local Backup	U disk, USB mobile HDD
Network Backup	Yes
Port	
USB	USB 2.0 x 2 one in the front panel and the other in the rear panel
RS 485	RS 485 x 2; connect to PTZ or keyboard
Remote Controller	Optional
Others	
Power Supply	DC 12V/3A
Consumption	≤ 15W (without HDD)
Dimensions (mm)	380 x 270 x 45 (W x D x H)
Work Environment	-10 ~ 50 °C, 10% ~ 90% humidity

