



QUICKFIT PREMIUM COAXIAL SERIES

QF20CS • QF60CS • QF80CS

When you need more power and solid bass response the QuickFit premium coaxial series of ceiling speakers are sure to exceed expectations.

This premium series features two way coaxial drivers producing high SPL and detailed audio reproduction. The frameless magnetic grilles allow easy removal of the grille for tapping changes and quick installation. Porting through the front baffle improves bass response and ensures detailed bass definition. The sealed back-can provides isolation in the ceiling space ensuring spill in the ceiling cavity is kept to a minimum.

If you require a black ceiling speaker it's as easy as changing the grille. A black grille for each model can be purchased separately as an accessory.

The QF20CS, QF60CS and QF80CS series of QuickFit ceiling speakers are the perfect choice for situations demanding high intelligibility and SPL. Pubs, clubs, bars, retail spaces, functions rooms, lecture rooms, boardrooms and many other commercial spaces requiring a premium high powered ceiling speaker solution.



QF60CS

FEATURES

- 4, 6 and 8 inch coaxial high powered driver
- QuickFit white frameless powder coated steel grille
- Sealed steel back can
- 100V and 16 ohm low impedance tapping
- Optional black grille available
- Tile Bridge included with QF60CS and QF80CS
- Front ported enclosure



QF60CS Front





QF60CS Front Without Grille





DIMENSIONS

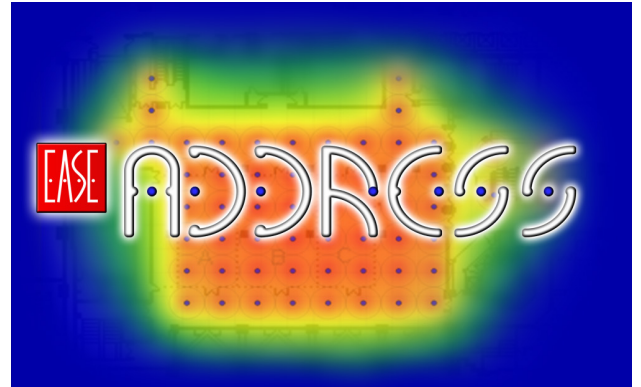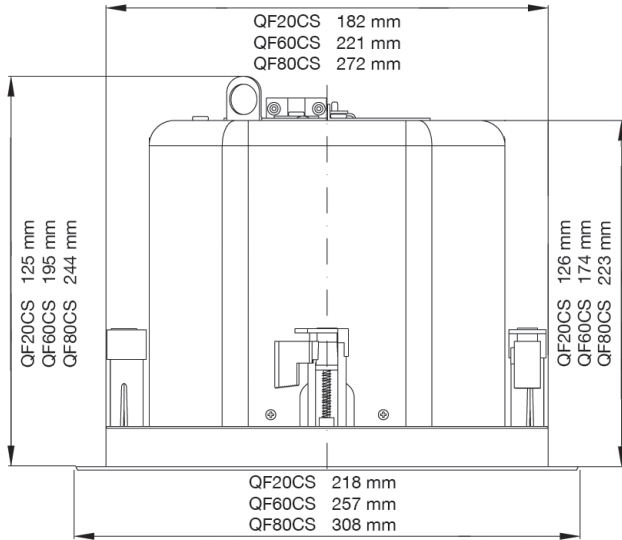

Please go to www.australianmonitor.com.au to download EASE® GLL files.

Polar plot and frequency charts for other QuickFit premium coaxial models are available at www.australianmonitor.com.au

MODEL	QF20CS	QF60CS	QF80CS
COAXIAL 2 WAY DRIVER	4 inch & 20mm	6.5 inch & 20mm	8 inch & 20mm
POWER TAPS @ 100V	20, 10, 5, 2.5 watts	60, 30, 15 watts	80, 40, 20 watts
POWER TAPS @ 70V	10, 5, 2.5, 1.75 watts	60, 30, 15, 7.5 watts	80, 40, 20, 10 watts
LOW-Z NOMINAL IMPEDANCE	16 Ohms	16 Ohms	16 Ohms
MAX POWER HANDLING	30 watts @ 16 Ohms	60 watts @ 16 Ohms	80 watts @ 16ohms
SENSITIVITY (1W/1M)	89dB	90dB	90dB
FREQUENCY RESPONSE	110-20 KHz	85-20 KHz	50-20 KHz
DISPERSION DEGREES @ 1KHZ	130	130	110
GRILLE COLOUR	White	White	White
WEIGHT	2.15 Kg	3.7 Kg	5.65 Kg
DIMENSIONS	218 x 125 mm	257 x 195 mm	308 x 244 mm
CUTOUT DIMENSION	182 mm	221 mm	272 mm
EVAC CAPACITOR 2.2UF	No	No	No
TILE BRIDGE – QF20CSTB	Not included	Included	Included
BLACK GRILLE ACCESSORY	QF20CSGRILLB	QF60CSGRILLB	QF80CSGRILLB

ENGINEERED BY AUSTRALIAN MONITOR

Address: Unit 1, 2 Daydream Street, Warriewood NSW 2102 Australia

Website: www.australianmonitor.com.au

International enquiries email: international@australianmonitor.com.au

ABN 86 003 231 187