



hippo 3M

Product Detail

- 1. AC Outlet
- 2. Cooling Condensed Water Intake
- 3. Outlet Pipe Connector




- 4. Backplane Slot
- 5. Overfall Gap



Specifications

- Applicable to all brand of air conditioners below 25,000 B.T.U.
- Power Supply / Frequency : AC 220V~240V 50 / 60Hz
- Max. Discharge Head: 3M
- Power Consumption (Max.): 18W
- Ambient Temperature Range : 0°~50°c Max
- Dimensions / Weight: (L) 18 X (W) 12 X (H) 14 cm / 0.6 kg
- · Material : ABS
- Discharge Pipe Size: Ø 4.3 X Ø 6.5 mm (5/32")

Water Hea (M) / Drainage (L / min)

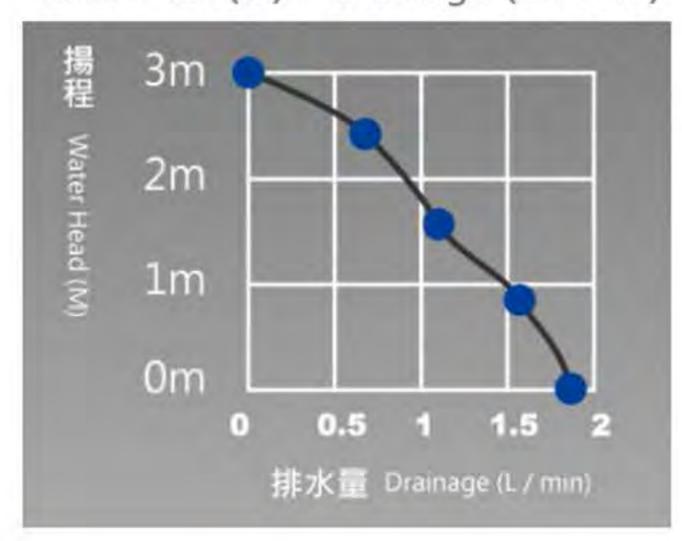

บริษัท บี.เค.แอร์ซัพพลาย จำกัด









Product Details

- Cooling Condensed Water Intake
- 2. Outlet Pipe Connector
- 3. AC Outlet




- 4. Overfall Gap
- 5. Backpalne Slot



Specifications

- Applicable to all brand of air conditioners below 36,000 B.T.U.
- Power Supply / Frequency: AC 220V~240V 50 / 60Hz
- Max. Discharge Head : 6M
- Power Consumption (Max.): 30W
- Ambient Temperature Range : 0°-50°c Max
- Dimensions / Weight : (L) 18 X (W) 8 X (H) 14 cm / 0.8 kg
- Material : ABS
- Discharge Pipe Size : ø 4.3 X ø 6.5 mm (5/32")

Water Head (M) / Drainage (L / min)

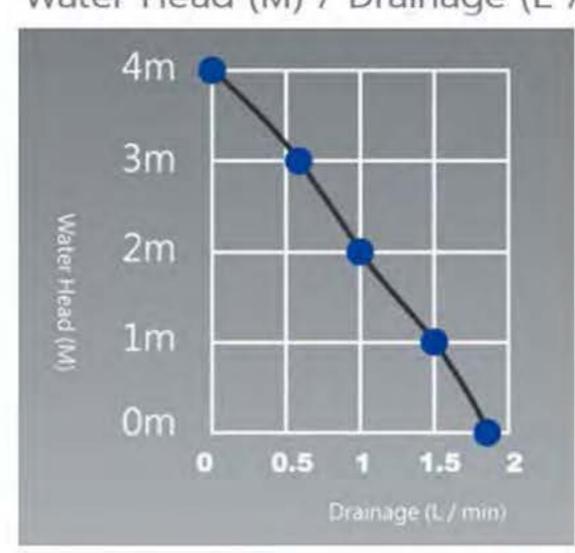

บริษัท บี.เค.แอร์ซัพพลาย จำกัด

611,613 ถนนพระราม3 แขวงบางโพงพาง เขตยานนาวา กรุงเทพมหานคร 10120 T: 02-284-2826 02-294-5260 02-294-5261 02-294-2972 F: 02-294-2973 email: bkairsupply@hotmail.com LINE ID: bkairsupply.com





Hippo II 45 M

Floor-standing type air condition 100,000 B.T.U.



Product Detail

- 1. Oversize Ventilation Holes
- 2. Outlet Pipe Connector
- 3. Water Intake of Cooling Condensed Pipe




- 4. Fixed Clips
- 5. Water Intake of Cooling Condensed Pipe



Specifications

- Applicable to air conditioners below 100,000 B.T.U.
- Power Supply / Frequency : AC 220V~240V 50 / 60Hz
- Max. Discharge Head: 50Hz / 4M, 60Hz / 5M
- Power Consumption (Max.): 70W
- Ambient Temperature Range: 0°~50°c Max
- Dimensions / Weight: (L) 21 X (W) 13.5 X H) 17 cm / 1.6 kg
- Material : ABS
- Discharge Pipe Size: ø 8 X ø11 mm
- · Motor:
 - (a) Type Shaded pole motor
 - (b) Protector High temperature protection fuse graph

Water Head (M) / Drainage (L / min)

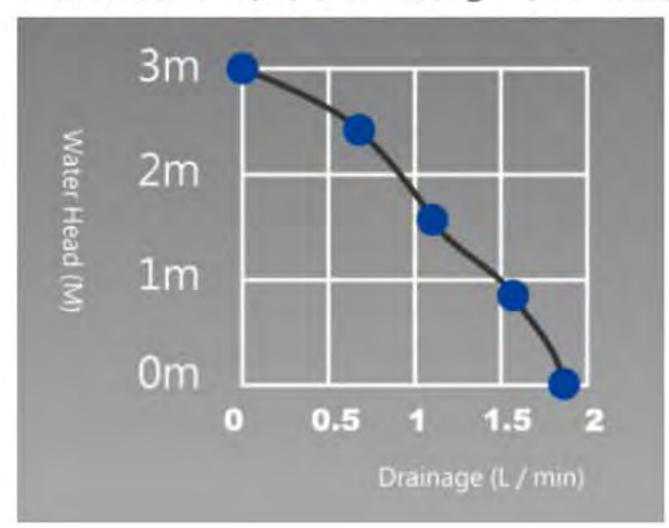

บริษัท บี.เค.แอร์ซัพพลาย จำกัด

611,613 ถนนพระราม3 แขวงบางโพงพาง เขตยานนาวา กรุงเทพมหานคร 10120 T: 02-284-2826 02-294-5260 02-294-5261 02-294-2972 F: 02-294-2973 email: bkairsupply@hotmail.com LINE ID: bkairsupply.com

