

UPVC、CPVC、PPH 涡轮式蝶阀


WORM GEAR TYPE BUTTERFLY VALVES



JOINT END: FLANGE (ANSI / DIN / JIS/ CNS)

WORKING PRESSURE: 150PSI

序号/NO.	名称/Item	材质/Material	数量/Qty	单位/Unit
01	本体/Body for valve	UPVC/CPVC/PPH	1	PCS
02	阀板/Disc	UPVC/CPVC/PPH	1	PCS
03	密封垫/Gasket	EPDM/VITON	1	PCS
04	涡轮本体/Turbine body	FC20	1	PCS
05	螺栓/Bolts	SUS304	4	PCS
06	把手/Handle	FC20	1	PCS
07	螺丝/Screw	SUS304	1	PCS
10	转轴/Shaft	SUS304/316	1	PCS
12	轴套/Shaft sleeve	PP	3	PCS
13	O-Ring	EPDM/VITON	6	PCS
14	底盖/Bottom cap	PP	1	PCS

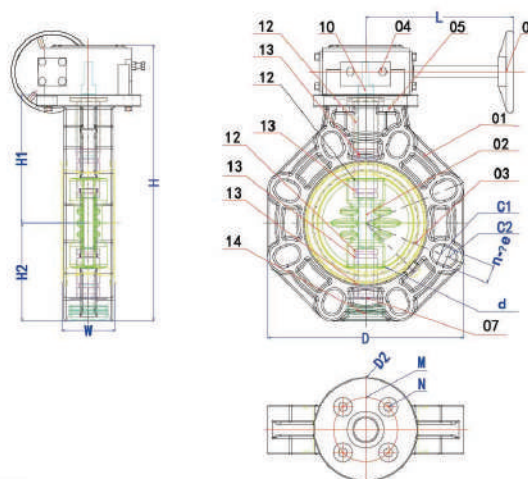

UNIT: MM

SIZE	d	C1	C2	H	H1	H2	W	D	D2	M	N	L	n-φe		Operating torque (N.M)
													JIS	DIN/ANSI	
2" (50)	65.0	120.0	125.0	250.0	110.0	80.0	48.0	160.0	112.0	70	9.0	165.0	4-19		8
2-1/2" (65)	65.0	139.0	145.0	256.0	110.0	86.0	48.0	172.0	112.0	70	9.0	165.0	4-19		8
3" (80)	80.0	150.0	160.0	278.0	126.0	91.5	50.0	183.0	112.0	70	9.0	165.0	8-19		13
4" (100)	101.0	175.0	191.0	303.0	138.0	105.0	53.0	211.0	112.0	70	9.0	165.0	8-19		23
5" (125)	126.0	210.0	216.0	334.0	154.0	120.0	66.0	239.0	112.0	70	9.0	165.0	8-23		38
6" (150)	148.0	239.0	242.0	360.0	168.0	132.0	72.0	264.0	136.0	70/102	11.0	215.0	8-23		29
8" (200-225)	198.0	290.0	298.0	463.0	205.0	163.5	72.0	322.0	136.0	102	11.0	215.0	12-23	8-23	52
10" (250-280)	245.0	350.0	362.0	555.0	265.0	200.0	92.0	398.0	135X135	102/125	11.0	215.0	12-26		90
12" (315)	291.0	400.0	432.0	636.0	310.0	236.0	112.0	471.0	135X135	102/125	11.0	215.0	12-26		180