


Multi-rail terminal block


TX, TXU and TXW Series

Standard type

Application			Type name	Number of contents	External dimensions (mm)				General mass per pole (g)
					A	B	C	D	
Terminal unit									
600V	1.25mm ² [15A]	M3×6± screw type	TX 7	60P	38	29	7.3	6	6
	2mm ² [20A]	M3×8± screw type	TX 10 SM3	60P			8	6.7	6.5
		M3.5×8± screw type	TX 10 S	60P			9.5	8	6.5
		M3.5×8± screw type	TX 10	60P					
	5.5mm ² [40A]	M4×10± screw type	TX 20	60P	46	34	12	9.7	11
	8mm ² [50A]	M5×12± screw type	TX 30	30P			14.5	12.5	22
	14mm ² [80A]	M5×12± screw type	TX 50	30P	37	15	25		
	22mm ² [90A]	M6×12± with round washer	TX 60	10P	54	38	19.5	17	37
	38mm ² [130A]	M8×14+ hexagonal bolt	TX 100	6P	72	45	27	24	83
	60mm ² [175A]	M8×16+ hexagonal bolt	TX 150	6P	76	51	28	25	96
	100mm ² [240A]	M10×12+ hexagonal bolt	TX 200	3P	82	57.5	39	31	175
	150mm ² [310A]	M10×20+ hexagonal bolt	TX 300	3P	86	62.5	46	37.5	215
	200mm ² [400A]	M12×25 hexagonal bolt	TX 400	3P	120	73.5	62	52	382
	150mm ² ×2 [500A]	M16×40 stud	TX 600	3P		86.5	64		650
200mm ² [400A]									
250mm ² [500A]									
325mm ² [600A]									
End plate									
For TX 7 to TX20			TXA 1	10 pieces	38	29	Thickness 3		2.5
For TX 30			TXA 3	10 pieces	46	34			4
For TX 50			TXA 5	10 pieces	49	37			5
For TX 60			TXA 6	5 pieces	54	38	Thickness 3.5		5.5
For TX 100			TXA 10	5 pieces	72	45	Thickness 4		11
For TX 150			TXA 15	5 pieces	76	51			14
Insulation barrier									
For TX 600 (Dimension A 240mm in setting)			TXH 60	2 pieces	—	—	—		12

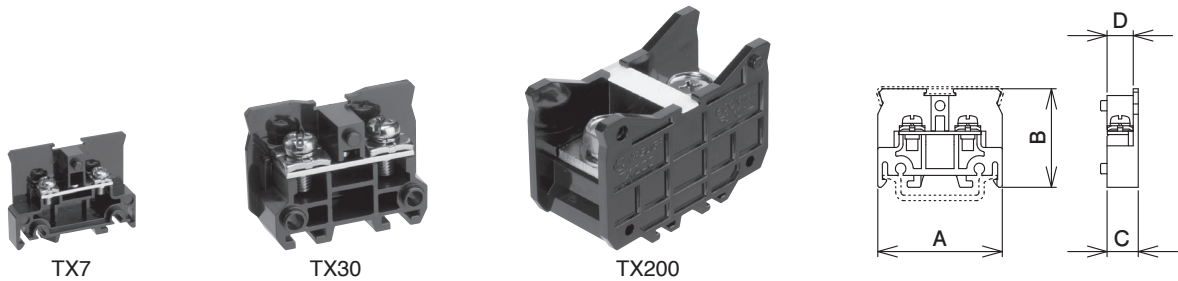

TX series

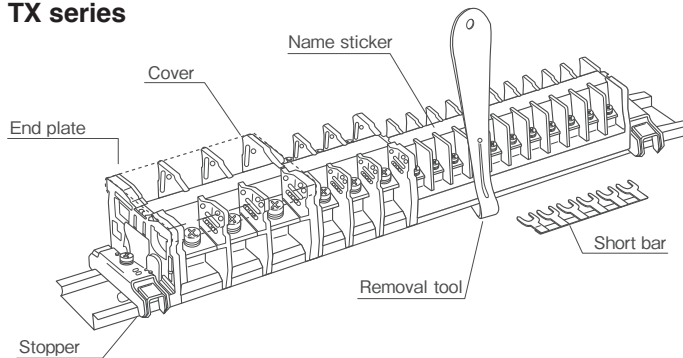

Line-up
Terminal Blocks
Clutch Lock
Terminal Blocks
PLC Interface
Terminal Blocks
Rail Type
Terminal Blocks
Assembly
Terminal Blocks
Special Purpose
Terminal Blocks
Terminal
Block Accessories