

วาล์วตั้งอัตโนมัติสำหรับงานอุตสาหกรรมหนัก:

Model AF-11H F




เหมาะสำหรับใช้กับเครื่องแลกเปลี่ยนความร้อน, เครื่องอบแห้ง, เหมเตอร์ และอุปกรณ์อื่นๆ เนื่องด้วยการทำการระบายได้ในปริมาณมาก

เป็นแรปที่ใช้ในงานหนักๆ แบบคั่นโยกลอย ที่ถูกออกแบบพัฒนาด้วยโครงสร้างที่เรียบง่าย ไม่ซับซ้อน

Specifications

Model Name	AF-11HF
Code name	AF11HF-B
Size	65 80 (2.1/2" 3")
Applicable pressure	Max 0.35 MPa
Fluid temperature	Max 150°C
End connection	Flanged JIS 5KFF*
Materials	Body (Cast iron) Disc & Seat (Cast bronze) Float (Brass)
Valve body pressure test	Hydraulic 0.53 MPa

Construction (Unit : mm)

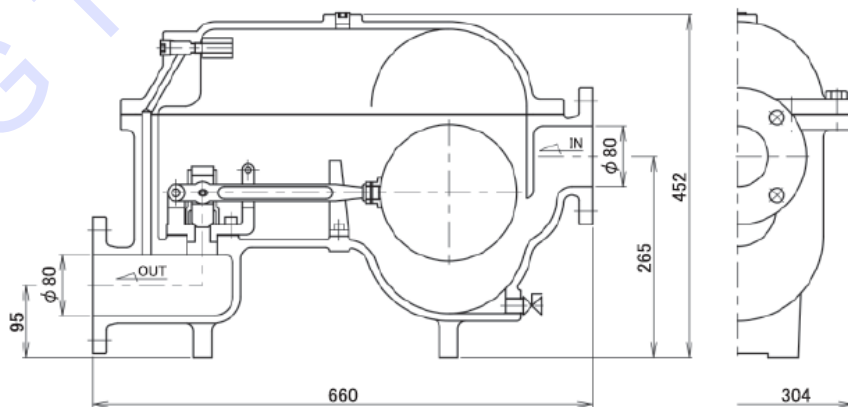

Weight:90kg

Table for capacity (Max. continual discharge amount)(m³/h)

Different pressure (MPa)	0.03	0.05	0.1	0.2	0.3	0.35
Discharge amount	4.45	6.03	8.32	10.90	12.70	13.50

Points for size selection

Select a proper size that can meet the requirement or safety factor and allow at least 3 times of planned discharge volume.

In the case there is back pressure at the outlet side of trap, use the differential pressure between inlet and outlet sides to select the size of valve.

KRUNG THAI EQUIPMENT CO., LTD.