


Foot Valve Model: JUNIORBLOCK 100300



Reduced bore foot valve, UNI ISO 228/1-G, female threaded, with stainless steel strainer

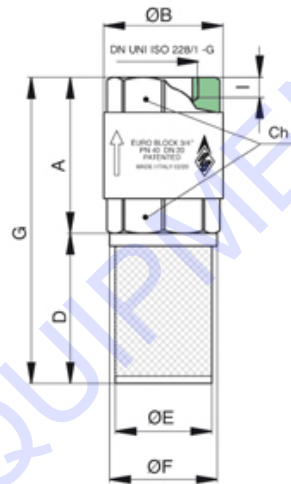

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	OTTONE CW617N UNI EN12165	1
2	END CONNECTION	OTTONE CW617N UNI EN12165	1
3	SPRING	ACCIAIO INOX AISI 302	1
4	FLAT SEAT	NBR	1
5	OBSTRUCTOR	PEI (ULTEM 1000)	1

SIZE	DN	I	Ch	ØB	A	D	ØE	ØF	G	Kv	PN	Kg
1/2"	15	12	25	28	44,5	43	23	26	87,5	3,7	40	0,10
3/4"	20	12	31	34,5	47,5	48	29	32	95,5	5,8	40	0,17
1"	25	14,5	38	42	56	48	38	41	104	8,6	25	0,27
1"1/4	32	16	48	52	62	57	45	49	119	13,8	25	0,43
1"1/2	40	18	54	61	70	68	50	55	138	20,2	16	0,62
2"	50	19	67	73	78	83	62	67	161	30,9	16	0,93
2"1/2	65	24	83	90	92	83,5	82	86	175,5	48,8	12	1,48
3"	80	29	98	113	113,5	99	94	99	212,5	79,4	12	2,51
4"	100	32	128	139	126,8	115	117	122	241,8	124,9	10	4,41

Temperature range -20°C + 100°C