

VA30G Series

Glass Rotameters

VA30G glass rotameter are the new products of our company.compared with the other domestic products of the same type,it has advantages of high measuring precision,good interchangeability,multiple connection ways,especially the value of flow rate of the flow meter is in millimeter scale mark,which is capable of providing actual flow scale according to the temperature, pressure,density,and viscosity of different flows,solving the problem of indication correction.As for the ways of connection.The loose flange structure is available,with both conventional type and corrosion-proof type.



- Temperature limit: 120°C
- Accuracy: ±2.5%

Specifications

D N (mm)	Model	Measuring range		Working Pressure (Mpa)	Temp.
		Water (L/h)	Air (m³/h)		
15	VA30G-15	4~40	0.12~1.2	≤1.0	
		6~60	0.3~3		
		10~100	0.5~5		
		16~160	0.8~8		
		25~250	1.2~12		
		40~400	2~20		
25	VA30G-25	63~630	2~20	≤1.0	-20°C ~120°C
		100~1000	3~30		
		160~1600	5~50		
		250~2500	8~80		
40	VA30G-40	160~1600	5~50	≤0.9	
		250~2500	8~80		
		400~4000	12~120		
50	VA30G-50	400~4000	12~120	≤0.7	
		630~6300	20~200		
		1000~10000	30~300		
		4~16m³/h			

VA30G

How to order

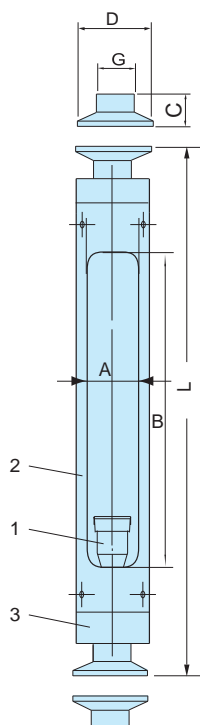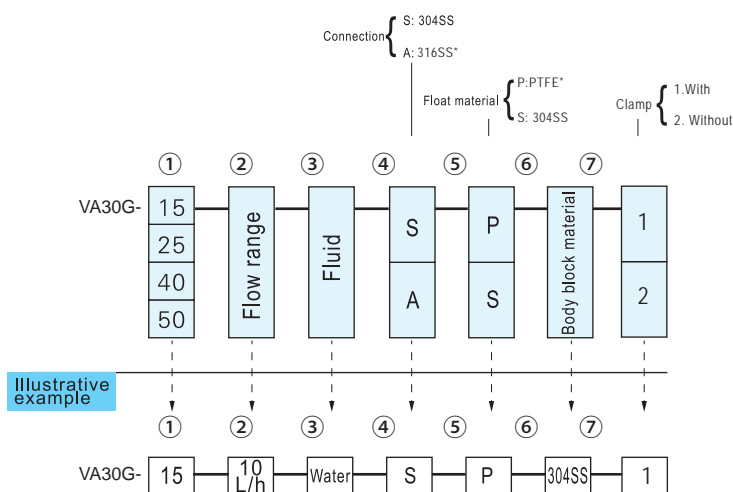

Unit:mm



Spare part of clamp

D N (mm)	Sizes						Weights (KG)
	L	B	A	C	D	G	
15	370	270	25	21	51	19	1.6
25	368	236	40	21	51	25.4	4
40	378	226	50	21	64	45	6
50	378	226	60	21	77.5	51	9

Materials

No.	Materials
1	304SS, 316SS*, PTFE*
2	304SS
3	304SS, 316SS*