

SPEC Line Interactive UPS with Stabilizer



Microprocessor Control
Digitalizing internal system process for increasing efficiency and Responsiveness.



Buck/Boost Voltage Stabilizer
Adjusting low/high voltage to safe level so that consumers can work indefinitely during brownouts.




Fastest Charging Capacity
Battery can be recharged to 90% of its capacity within 4 hours.



Cold-start Function
Turning on the UPS without connecting the utility.

- Auto restart while AC is recovering
- Off-mode charging
- Simulated sine wave
- Compact size

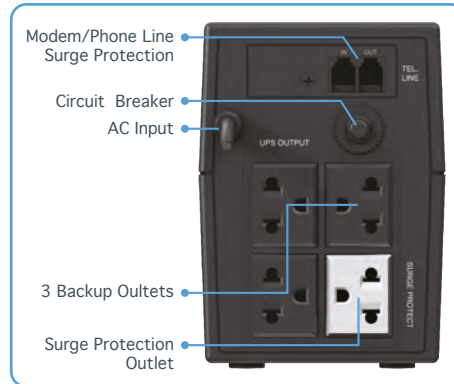

SPEC-900V

Protect your data loss
Protect your computer

Product from ISO 9001, ISO 14001 and ISO 45001 Certified Factory

2
YEARS
WARRANTY

SPEC Line Interactive UPS with Stabilizer



MODEL	SPEC-900V	
CAPACITY	900 VA / 360 W	
SYSTEM	UPS system	Line interactive UPS with stabilizer
	Control system	Microprocessor control
	Stabilizer function	Buck / Boost
LOAD APPLICATION	The number of PC*	1 set + printer**
INPUT	Voltage (single phase)	220 Vac ± 25%
	Frequency	50 Hz ± 10%
OUTPUT	Voltage battery mode	220 Vac ± 5%
	Voltage AC mode	220 Vac ± 10%
BATTERY	Type / Capacity	Sealed lead acid (maintenance free) / 12 V 7.2 Ah
	Backup time	10 - 30 min. (depending on connected load)
	Continuous recharging time	4 - 6 hours (90% after full discharged)
PROTECTION	Over voltage	Mains to UPS backup 220 Vac + 25%
	Under voltage	Mains to UPS backup 220 Vac - 25%
	Transfer time	2 - 6 msec typical, 10 msec maximum
	Overload (AC / DC mode)	yes
	Output short circuit	yes
	Surge energy dissipation	125 Joules / 2 msec
	Power dissipation	1,000,000 W within 100 microsec.
OUTPUT OUTLET	Number of backup outlet	3
	Number of surge protection outlet (not backup)	1
FEATURES	AC / DC start	yes
	Surge protection for telephone line	yes
	Surge protection for laser printer	yes
	Auto start function	yes
	Off mode charging	yes
INDICATOR	LED	AC mode (green), Battery mode (green), Fault (red)
AUDIBLE ALARM (BUZZER)	Battery mode	Audible beep every 10 seconds
	Low battery	Audible beep every second
	Overload	Audible beep every 0.5 seconds
	Fault	Continuous audible beep
ENVIRONMENT	Temperature	0 - 40°C
	Humidity	0 - 90% (non-condensing)
	Acoustic noise	less than 45 dBA at 1 metre
CONFORMANCE	Safety	IEC/EN 62040-1, IEC/EN 60950-1
	EMC	IEC/EN 62040-2, IEC 610000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC61000-4-6, IEC 61000-4-8
	Performance	IEC/EN 62040-3
DIMENSIONS	W x H x D (mm.)	101 x 142 x 298 mm
WEIGHT	Approximate in kg.	4.3 kg

PC* = Computer with 19.5" LED monitor, Printer** = Bubble jet or Dot Matrix printer only.
Continuous product development is our commitment. In that manner, the above specifications may be change without prior notice.

LEO POWER SUPPLY CO.,LTD.

27, 4th Floor, Soi Bangna-Trad 34, Bangna Tai, Bangna, Bangkok 10260
Phone 0-2746-9500 Fax 0-2746-8712 E-mail: marketing@lpsups.com

SPE.BRO.UPS.011 Rev.25.00/2023