

# MIRCOBOT MB703

รีโมทอินฟราเรด รุ่น RM952

## RM952 IR REMOTE CONTROL

รีโมทรุ่นนี้เป็นสินค้าสำเร็จรูป ที่ทำหน้าที่เป็นตัวส่งสัญญาณอินฟราเรด ความถี่ประมาณ 40 กิโลเฮิร์ตให้กับวงจรตัวรับอินฟราเรด รุ่น TSOP4838 (MB704) โดยจะต้องมีไมโครคอนโทรลเลอร์มาถอดรหัสคำสั่งแต่ละปุ่มเพื่อนำไปใช้งานต่อไป อนึ่งรีโมท MB704 นี้ยังสามารถใช้ร่วมหรือทดแทนกับวงจรอิเล็กทรอนิกส์ดังต่อไปนี้

FK-FA440 รีโมทอินฟราเรด 1 ช่อง ขยายได้ รับและส่ง  
FK-FA441 ภาครับรีโมทอินฟราเรด 1 ช่อง ขยายได้  
FK-FA442 รีโมทอินฟราเรด 5 ช่อง ขยายได้ รับและส่ง  
FK-FA443 ภาครับรีโมทอินฟราเรด 5 ช่อง ขยายได้

### คุณสมบัติ

- ไฟเลี้ยงจากแบตเตอรี่ขนาด AA จำนวน 2 ก้อน
- กระแสสูงสุด 25 มิลลิแอมป์
- กระแส STANBY 1 มิลลิแอมป์
- การส่งข้อมูลมาตรฐาน SONY RC5 12 บิต
- ขนาด 54 x142 x32 มิลลิเมตร

This remote control is a finished goods product.

Serving as infrared transmitter, has the frequency around 40 KHz for circuit Infrared sensor. TSOP4838 (MB704) require controller for decoding the command.

And remote controller MB704 also can compatible or replacement circuits electronic

as follows:

-FK-FA440 Single Channel Infrared Remote Control

-FK-FA441 Single Channel Infrared Remote

Controlled Receiver

- FK-FA442 Five Channel Infrared Remote Control

-FK-FA443 Five Channel Infrared Remote Controlled

Receiver


### Feature

-Power supply : Battery AAx2 pcs.

-Consumption : 25 mA max, stanby 1mA

-Transmission standard : SONY RC5 12 bit

- Dimensions : 54 x142 x32 mm.

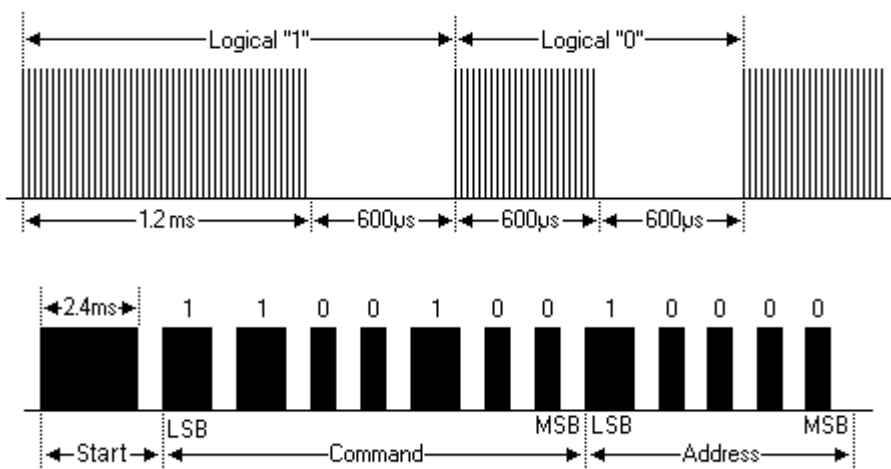

Waveform Infrared Remote

