

# KOLDTECH®

STANDARD ITEMS

## UNDERCOUNTER UNIT

UCR-GN1-1400



*Knock-down system, convenient to transport and can be assembled on site.*


## UCR / UCF GN1-SERIES Undercounter Refrigerator / freezer

### STANDARD FEATURES


- Insulation** High structural strength polyurethane foamed-in-place insulation.
- Finish** Tough, hygienic construction, exterior bodies are stainless steel 403 no.4 finish. Interior is stainless steel 304 2B finish. Stainless steel top, Zincalume steel base and back are standard.
- Door** Self closing door with easily replaceable magnetic gasket. Mullion heater are standard for freezer units but optional for refrigerator. Double pane heat reflective glass doors or stainless steel drawers are available as options. Use clips as shelf support with SS tray slide model available as option to accommodate standard GN 1/1 pan.
- System** Self-contained, left or right condensing unit or remote as option. Fitted with condensate evaporator, no drain connection required. Refrigeration is mounted on an easily removable platform for ease of service. System can be easily replaced or removed for off-site repair. Every unit is fully tested before leaving the factory.
- Controller** Multi-function microprocessor controller with digital temperature display.
- Refrigerant**
  - o R-134a for refrigerator
  - o R-404a for freezer
- Temperature range**
  - o Refrigerator 2 °C to 5 °C
  - o Freezer -15 °C to -18 °C
- Optional Extra\***
  - Tray slide model which can accommodate GN 1/1 pans.
  - Pass through S/S door at the back. 2 or 3 drawers instead of S/S door.
  - Stainless steel wire shelf.
  - Glass door instead of S/S door.
  - Marble or granite top.
  - Stainless steel base and back.
  - Swivel castors.
  - Different types of splashback.
  - Cylinder locks.
  - Fully or partially knock down.

\*\*3 section drawers freezers are offered as custom made item. The dimension L1885 x D750 x H850 mm.


TECHNICAL DATA	REFRIGERATED MODELS			FREEZER MODELS		
REFRIGERATOR MODEL	UCR-GN1-950	UCR-GN1-1400	UCR-GN1-1850	UCF-GN1-950	UCF-GN1-1400	UCF-GN1-1850
Dimension L x D x H (mm.)	950 x 750 x 850	1400 x 750 x 850	1850 x 750 x 850	950 x 750 x 850	1400 x 750 x 850	1850 x 750 x 850
Capacity Litres	160	329	485	160	329	485
Current consumption (Amps)	2.76	3.64	4.78	4.53	4.6	5.48
Compressor (hp)	1/5	1/4	1/3	1/2	1/2	3/4
Shelves	2	4	6	2	4	6
Power supply	220-240 V / 50 Hz / 1 Ph (60 Hz models are available)					




UCR / UCF-GN1-950




UCR / UCF-GN1-1400

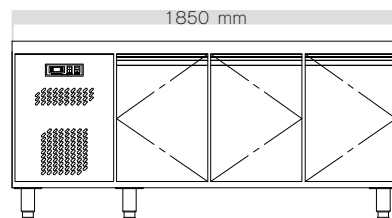



UCR / UCF-GN1-1850



CROSS SECTION



UCR / UCF-GN1-1400-1D-2Dw-L



UCR / UCF-GN1-1400-1D-3Dw-L

