


MSD 71 2b

1-Phase 230 V 50 Hz

Duty Type : S1
 Degree of protection : IP 55 (TEFC)
 Insulation class : F (155 °C)
 Temp rise : Class B (80K)
 Mounting Design : B3

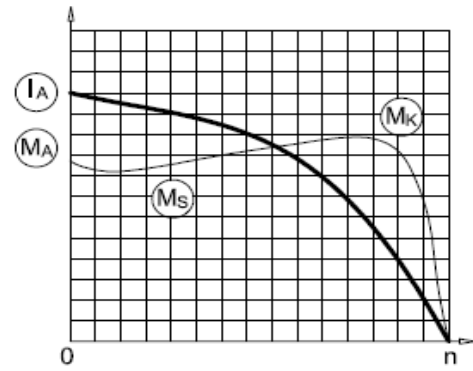

ELECTRICAL DESIGN

Rated output (kW) : 0.55
 Speed (rpm) : 2865
 Rated current (A) : 3.5
 Torque – Mn (Nm) : 1.83
 Starting Capacitor 330V (μF) : 88-106
 Permanent Capacitor 400V (μF) : 20
 Cos φ : 0.98
 Efficiency % : 70.0
 Moment of inertia J (kgm)² : 0.00035


Locked rotor Current – I_a (A) : 16.45
 I_a / I_n : 4.7
 Locked rotor Torque – M_a (Nm) : 4.0
 M_a / M_n : 2.2
 Breakdown Torque – M_k (Nm) : 4.2
 M_k / M_n : 2.3

MECHANICAL DESIGN

Frame : Aluminium
 End shields : Aluminium
 Cooling fan : Plastic
 Terminal box : Plastic
 Cable gland : Pg 16
 No of cable glands : 1

Bearing Arrangement

	Drive End	Non Drive End
Standard design	6202 ZZ	6202 ZZ
Paint	: RAL 7031- Grey	
Approximate weight (kg)	: 7.2	

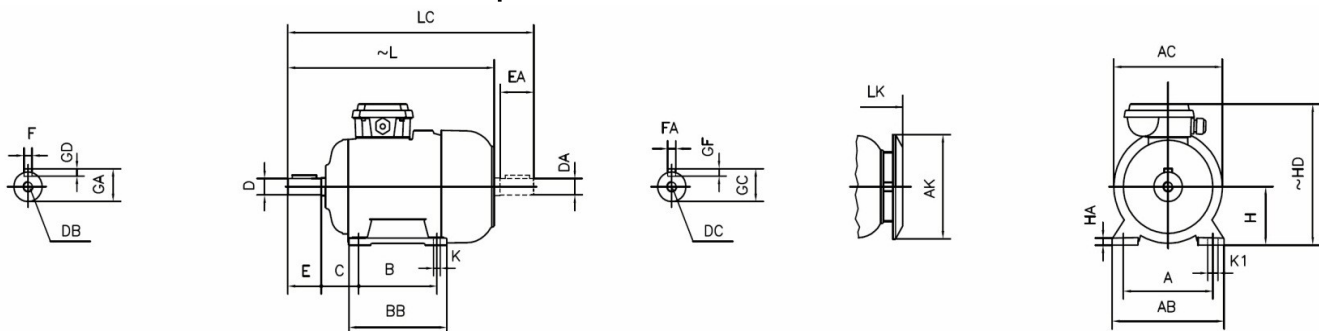

DIMENSIONS

FOOT MOUNTED MOTORS - B3, B6, B7, B8 B15, V5, V6

H	HD	HA	A	AB	AC Ø	AK Ø	K	K1	B	BB	L	LC	LK	C	E	DB	DØ	GA	FXGD
	~										~		~		EA	DC	DAØ	GC	FAXGF
71	208	10	112	140	138	116	7	11	90	108	247	282	277	45	30	M5	14	16	5X5