


METACAULK® PIPE COLLARS

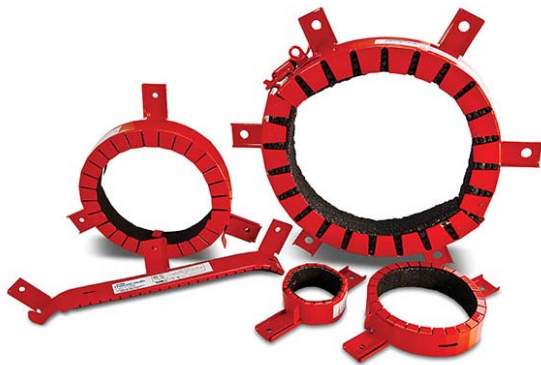

- 25% REDUCTION OF INSTALLATION TIME
- SIMPLE LOCKING MECHANISM FOR EASY INSTALLATION
- HIGHLY INTUMESCENT
- ECONOMICAL - MOST SYSTEMS DO NOT REQUIRE BACKFILL
- NO MEASUREMENT OF MATERIAL
- FITS IN LIMITED ACCESS AREAS

Metacaulk® Pipe Collars are prefabricated for use in through-penetration firestop systems using PVC, CPVC, ABS, Poly Pro, PVC foam core and ABS foam core pipe. UL Classified for both open and closed pipe systems. Available in sizes from 1 1/2 inch to 6 inch. Complies to Required Environmental Exposure Testing of Accelerated Aging and High Humidity as per UL 1479 Fire Test of Through-Penetration Firestops.

SETTING THE STANDARDS BY WHICH OTHERS ARE JUDGED



METACAULK® PIPE COLLAR

Prefabricated Firestop System

Description

Metacaulk® Pipe Collars are prefabricated for open and closed through-penetration firestop systems using 1 1/2"(38 mm) to 6" (152 mm) plastic pipe. An easy locking tab assures easy installation. The collar design greatly reduces the time and expense that is required to install competitive collars.

Applications

Metacaulk Pipe Collars are used to seal off plastic pipe both in closed and vented (DWV) conditions. Also for use on up to 6" (152 mm) diameter ABS (cellular core or solid core), FRPP, PVC and CPVC pipe. The collar may be used on up to 3 hour rated concrete floors and walls, up to 2 hour rated gypsum walls and up to 2 hour rated wood floors.

Packaging

| Code | Size | Qty. per Case |
|-------|--------|---------------|
| 66352 | 1 1/2" | 12 |
| 66353 | 2" | 12 |
| 66350 | 3" | 6 |
| 66351 | 4" | 6 |
| 66354 | 6" | 2 |

Installation Data

Metacaulk Pipe Collar are prefilled and very easy to install.

Step 1 Select the proper collar to fit the diameter of pipe used.

Step 2 Making sure annular space is within the limits set by the tested conditions, attach collar around the pipe on the underside of the floor or to each side of a wall by firmly placing against the wall or floor and securing interlocking tabs [1 1/2" (38 mm), 2" (51 mm), 3" (76 mm) and 4" (102 mm)] or fastening the buckle [6" (152 mm)].

Step 3 If needed, mark and predrill wall or floor for required anchors. Properly secure the appropriate anchor into each of the anchoring tabs. In concrete, use 1/4" (6 mm) x 1 1/4" (32 mm) hex washer head type concrete anchors or appropriate steel expansion/wedge anchors. In gypsum, use 1/8" (3 mm) x 2" (51 mm) MOLLY type hollow wall anchors or 1 1/2" drywall or drywall laminating screws. Fender washers have been provided to be used with the fasteners.

Step 4 If an additional smoke seal is required, Metacaulk 1000 may be applied within the annular space before the attachment of the collar.

Consult UL Directory for complete instructions and system listings.



Characteristics | Features

- Saves on labor cost
- Easy installation
- Economical
- No measurement of material required
- Highly intumescent
- Tested for pvc, cpvc, abs and pvc/abs foam core, frpp

Material Properties

| | |
|-----------------------|------|
| Asbestos Fillers | None |
| Solvents | None |
| Hazardous Ingredients | None |

Activation of Intumescence:

| | |
|--------------------|---------------------------------|
| Expansion Begins | 375°F (190°C) |
| Expansion Greatest | 575°F - 1100°F 302°C - 593°C |



Testing Data

Metacaulk Pipe Collars are classified by Underwriters Laboratories as a Firestop Device. For specific test criteria, see the UL Product iQ. Metacaulk® Pipe Collars were tested at a minimum .01 inches (2.5 Pa) of water positive pressure in accordance with UL 1479 (ASTM E814) test standards. Tested to Can/ULC-S115 (Fire Tests of Firestop Systems) test standards. Complies to Required Environmental Exposure Testing of Accelerated Aging and High Humidity as per UL 1479 Fire Test of Through-Penetration Firestops.



FBC™ System Compatible* indicates that this product has been tested, and is monitored on an ongoing basis, to assure its chemical compatibility with FlowGuard Gold®, BlazeMaster® and Corzan® pipe and fittings.

FBC, FlowGuard Gold®, BlazeMaster® and Corzan® are licensed trademarks of the Lubrizol Corporation.

Inspection & Repair

RectorSeal recommends that a firestop system inspection be conducted during installation of the material in accordance with ASTM E2174 and ASTM E 2393. In the event post-installation inspection and destructive sampling is necessary, RectorSeal advises repairing the damaged firestop system by replacing any material that was removed or damaged with the same product originally installed, and ensuring the assembly matches the original firestop listing. RectorSeal advises, that due to the chemical nature of firestop products and sealants, material depth should be determined by measuring the points of adhesion at the substrate bond area as sealants may decrease in size during the curing process.

Storage & Handling

Metacaulk Pipe Collars should be stored in a dry place. Keep product stored under protective cover in original container.

Limitations

Not for use in outdoor environments where long-term exposure to rainfall or saltwater spray may occur. No other limitations known if used as directed.

Cautions

KEEP OUT OF REACH OF CHILDREN.

For additional information, refer to Safety Data Sheet.

Limited Warranty

RectorSeal, LLC makes the Limited Express Warranty that when the instructions for storage and handling of our products are followed we warrant our products to be free from defects. THIS LIMITED EXPRESS WARRANTY IS EXPRESSLY IN LIEU OF ANY OTHER EXPRESS OR IMPLIED WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, AND OF ANY OTHER OBLIGATION ON THE PART OF RectorSeal, LLC. The sole remedy for breach of the Limited Express Warranty shall be the refund of the purchase price. All other liability is negated and disclaimed, and RectorSeal, LLC shall not be liable for incidental or consequential damages.



Manufactured by **RectorSeal® LLC • 2601 Spenwick Drive, Houston, TX 77055, USA • 800-231-3345 • Fax 800-441-0051 • RectorSeal.com**

A CSW Industrials Company. RectorSeal, the logos and other trademarks are property of RectorSeal, LLC, its affiliates or its licensor's and are protected by copyright, trademark and other intellectual property laws, and may not be used without permission. RectorSeal reserves the right to change specifications without prior notice. ©2018 RectorSeal. All rights reserved. R50101-0319



DURMAST CO., LTD.

48 Moo 2, Soi Watsripawat, Paduangswat Rd., Salagrang, Bangkuay, Nonthaburi, Thailand 11130
Tel. (662) 490-4445-6 Fax. (662) 490-4447 www.durmast.co.th E-mail : durmastsales@gmail.com