


Data Sheet of Transfer Label barcode Printer

Item #	Thermal Transfer label Printer RP400H	
Photo		
	RP400H (USB+ Serial+ Parallel+ Ethernet):	
Printing	Resolution	High speed 203dpi
	Printing method	Thermal Transfer/Direct Thermal
	Printing speed	4-5 Inch/s
	Max printing width	104mm (4.09')
	Max printing Length	2286mm (90')
	Interface	USB/ (USB+ Serial+Parallel+Ethernet)
	Print head (abrasive)	50km
	Commands	TSC
Ribbon	Ribbon OD	Max 60mm
	Ribbon Length	Max 300M
	Ribbon width	Min. 30mm; Max. 110mm
	Ribbon Core Size	25.4mm
	Ribbon Rolling Up Method	Outward Rolling
Media	Max Media Roll OD	127mm (5")
	Min Media Roll ID	25mm
	Media Paper Type	Continuous, gap, fan hold, black mark,
	Media Rolling Up Method	Printing side outward Rolling
	Media width	Max 120mm (4.72"), Min: 20mm (0.78")
	Media Roll Core Size	25.4mm~38mm
	Media Gap	Min.2mm
	Media Thickness	0.058mm~0.305mm
	Label Length	10mm~2286mm
Accessories	External Media Holder (Optional)	
Software	Editing Software	Nicelabel SE
	Driver	Windows 2000、 XP、 Vista、 Win7、 Win8、 Windows Server
Character font	Character Set	GB18030 (Simplified Chinese)
	Print font	ASCII Font A: 12*24 ASCII Font B: 9*24 Chinese: 24*24
Barcode type	1D code	Code39, Code93, Code128 subsets A, B, C, Codabar, Interleaved 2 of 5, EAN-13,EAN-14, EAN-128, UPC-A, UPC-E, EAN and UPC 2(5) digits add-on, MSI,PLESSEY, POSTNET, China POS, ITF14
	2D code	QR code
Picture format	Graphics processing	Support BMP/PCX/BAS
Environment Specification	Temperature	Working: 5-45°C, Storage: -10~50°C
	Humidity	Working : 25%~85% ; Storage: 10%~90%
Power supply		Input: AC 110V/240V, Output: DC24V/2.5A,60W
Storage		4MB
Dimension		223*286*169mm
Printer weight		2.35kg

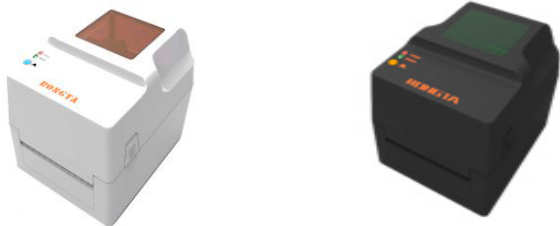