

**I FEATURES**

1. It is used the microcomputer (CPU) technique and junction laser technique for one instrument combine PHOTO TACH. (RPM) & CONTACT TACH (RPM, m/min).
2. Wide measuring range and high resolution.
3. Yellow green backlight makes sure that tachometer can work normally in any light circumstance.
4. The last displayed value/max. Value/min. Value maybe automatically stored in memory and 96s of measured value continuously. So this makes customers collected and recorded data. (The tachometer starts to store the data measured after which is renovation for three times).
5. The tachometer can be connected 6V direct current stable voltage power in favor of using for long time.
6. Low battery voltage indication.
7. Contact part and photo part can be switched value at any time.
8. New surface speed sensor with flute vials to measure speed and length of wire, cable and rope conveniently.
9. The instrument is delicate and rugged. It uses the durable, long-lasting components and a strong, light weight ABC plastic housing. The comfortably in either hand.

**II SPECIFICATION****1、 Display:** 5digital, 18mm (0.7" yellow green backlight LCD)Accuracy:  $\pm(0.05\%+1\text{digital})$ 

Sampling Time: 0.8second (over 60RPM)

Range Select: Auto-range

Time Base: Quartz crystal

Detecting Distance: 50mm-500mm (photo)

Dimension: 210×74×37mm

Power: 4×1.5V AA size battery or 6V direct current stable voltage power.

Power consumption: approx. 65mA

- 2、 **Memory call button operation A readout** (the max value, min value, last value) obtained immediately before turning off the MEATURING BUTTON is automatically memorized. For example, please ret. following figure 1. That memorized value can be displayed on the indicator by turn once depressing the memory button. The symbol "UP" represents the MAX. Value and "DN" the MIN. Value, "LA" the Last Value.

**3、 Data stored button operation**

- 3.1 Display last value and for the fourth time press memory button, the tachometer will indicate whether to switch to another display mode. During display value changing from 20 to 1, it is switched if you release memory button that have not change to max value/min value/last value will be displayed in turn by pressing memory button anytime.

- 3.2 If the value changes form 20 to 1 (please ret. Following figure 2) and displaying "An \*\*" (An is ab. of anamnesis). The display is switched successfully. So the memory button is pressed, stored data will be displayed in turn. Display format is as follow: the first is serial number of stored data and then display the concrete value. After all stored data is displayed(96s), the tachometer will automatically switch to display max value/ min, value / last value. (more difference of data value, less data stored)

**Eg.:** the displaying is "An 64" when 64s of measuring data is stored in one measuring(see fig.3). The tachometer will display the stored data in turn by pressing the memory button. The first value is 350.3RPM and the second 317.1RPM, analogically the 64<sup>th</sup> value is 337.0RPM (see fig.4).

**Reminds:** The contact line button do not stores max value /min value and measuring data but last value. All data will be canceled and the tachometer will start to measure and store data again if measuring button is pressed when looking over measured data.

**4、 Battery replacement**

- 4.1 When it is necessary to replace the battery(battery voltage less tan approx.4.5V), will appear on the display.
- 4.2 Slide the battery cover away from the instrument and remove the battery.
- 4.3 Install the batteries into the case permanent damage to the circuit may result form incorrect installation.

## 5、Reminds

- 5.1 Reflective mark: cut and peel adhesive tape provided into approx. 12mm (0.5") squares and apply one square to each rotation shaft. The non-reflective area must always be greater than the reflective area. If the shaft is normally reflective, it must be covered with black tape or black paint before attaching reflective tape. Shaft surface must be clean and smooth before applying reflective tape.
- 5.2 Very low RPM measurement: as if is easy to get high resolution. If measuring the very low RPM values, suggest user to attach more "reflective marks" averagely. Then divide the reading shown by the number of "reflective marks" to get the real RPM.
- 5.3 Contact tachometer parts include large taper, small taper and pillar, large taper and pillar rubberpart is suitable to low speed and but the small high speed.
- 5.4 If the instrument is not to be used for any extended period, remove batteries.

## III PHOTO TACHOMETER

Measuring Range: 2.5 to 99999RMP

Resolution: 0.1RPM (2.5 to 999.9RMP)

1RPM (over 1000RPM)

Total Test Range: 1 to 99999

### Panel description:

A: Reflective mark

B: Signal light beam

C: Measure button

D: Function switch

E: Memory call button

F: Display window

G: Battery cover

### Measuring procedure

#### 1. PHOTO RPM MEASUREMENT

- a. Apply a reflective mark to the object being measured. Slide the function switch to "RPM" position.
- b. Depress the MEASURE BUTTON and align the visible light beam with the applied target. Verify that the MONITOR INDICATION lights when the target aligns with the beam.

#### 2. TOTAL MEASUREMENT

- a. Apply a reflective mark to the object being measured. Slide the function switch to "TOT" position.
- b. Install the batteries and press measuring button, then you see light beam line with the target, start measuring. The value will add 1 as the object rotate a circle or passed one reflective mark, herein, the total value will stored in the meter until loosen the button.
- c. It will display total value as you press "MEM" button.

### Accessories:

Carrying case	1pc
Reflecting tape marks	length 600mm
Operation manual	1pc
Damproof accessories	1pc
Bolt bag	1pc

## IV CONTACT TACHOMETER

**Measuring Range:** CONTACT THCH 0.5 to 19999RPM

Surface Speed (m/min): 0.05 to 1999.9m/min

Surface long (m): 0.05 to 99999m

### Resolution:

CONTACT THCH: 0.1RPM (0.5 to 999.9RPM)

1RPM (over 1000RPM)


Surface Speed: 0.01m/min (0.05 to 99.99m/min)

0.1m/min (over 100m/min)

Surface long: 0.02m (0.05 to 99999m)

### Panel description:

- A: surface speed wheel
- B: RPM adapter
- C: shaft
- D: measure button
- E: function switch
- F: memory call button
- G: display window
- H: battery cover

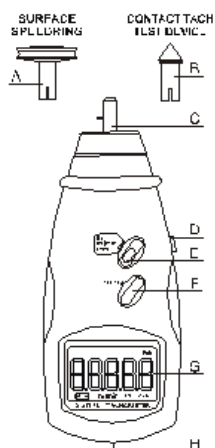

**Measuring procedur**

1. CONTACT TACH MEASUREMENT
  - a. Slide the FUNCTION SWITCH to “rpm” position. Install the proper RPM ADAPTER on the SHAFT.
  - b. Depress the MEASURING BUTTON and lightly pressing the RPM ADAPTER against the center hole of rotating shaft. Be certain to keep alignment straight. Release the MEASURING BUTTON when the display reading stabilizes.
2. SURFACE SPEED MEASUREMENT
  - a. Slide the FUNCTION SWITCH to “m/min”, in stall the SURFACE SPEED WHEEL on the SHAFT instead of the RPM ADAPTER.
  - b. Depress the MEASURING BUTTON and simply attaching the SURFACE SPEED WHEEL to the detector. Release the MEASURING BUTTON when the display reading stabilizes.
3. SURFACE LONG MEASUREMENT
  - a. Slide the FUNCTION SWITCH to “m” and use the corresponding part. The other same as (2).

**Note:** Because of the difference between the girth of outer surface and inner flute of line speed sensor. For contact line speed or length measurement. The displaying result is correct when outer surface of the sensor contacts with the measured object contact and but when inner flute of the sensor and the measured object, that the reading multiply 0.9is the real result (eg.: measure wire, cable and rope etc.)

**Accessories:**

Carrying case	1pc
Operation manual	1pc
Damproof accessories	1pc
Bolt bag	1pc
Contact speed measurement fitting	1pc
Contact rotational speed measurement fitting	3pcs

**V PHOTO TACH/CONTACT TACH**

**Measuring Range:** PHOTO TACH

- 2.5 to 99999RPM
- CONTACT TACH
- 0.5 to 19999RPM
- SURFACE SPEED (m/min)
- 0.05 to 1999.9m/min

**Resolution:**

- PHOTO TACH:
- 0.1RPM (2.5 to 999.9RPM)
- 1RPM (over 1000RPM)
- CONTACT TACH

0.1RPM (0.5to 999.9RPM)

1RPM ( over 1000RPM)


WURFACE SPEED

0.01m/min (0.05 to 99.99m/min)

0.1m/min (over 100m/min)

**Panel description:**

- A: Surface speed wheel
- B: Contact test device
- C: Contact measuring device
- D: Measure button
- E: Function switch
- F: Memory call button
- G: Display window
- H: Battery cover

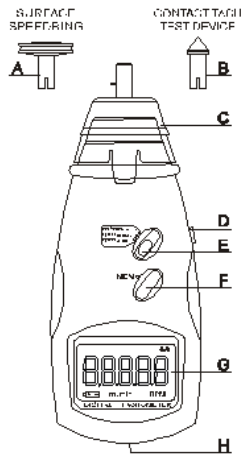

**Measuring procedure**

**1. PHOTO MEASURMENT**

- a. Apply a reflective mark to the object being measured. Slide the function switch to “rpm photo” position.
- b. Depress the MEASURE BUTTON and align the visible light beam with the applied target. Verify that the MONITOR INDICATOR lights when the target aligns with the beam.

**2. CONTACT TACH MEASUREMENT**

- a. Slide the FUNCTION SWITCH to “rpm contact” position. Install the proper RPM ADAPTER on the SHAFT.
- b. Depress the MEASURING BUTTON and lightly pressing the RPM ADAPTER against the center hole of rotating shaft. Be certain to keep alignment straight. Release the MEASURING BUTTON when the display reading stabilizes.

**3. SURFACE SPEED MEASUREMENT**

- a. Slide the FUNCTION SWITCH to “m/min contact” position. Install the SURFACE SPEED WHEEL on the SHAFT instead of the RPM ADAPTER.
- b. Depress the MEASURING BUTTON and simply attaching the SURFACE SPEED WHEEL to the detector. Release the MEASURING BUTTON when the display reading stabilizes.

**Note:** Because of the difference between the girth of outer surface and inner flute of line speed sensor. For contact line speed or length measurement, the displaying result is correct when outer surface of the sensor contacts with the measured object contact and but when inner flute of the sensor and the measured object, that the reading multiply 0.9 is the real result (eg.: measure wire, cable and rope etc.)

**Accessories:**

- Carrying case 1pc
- Reflecting tape marks length 600mm
- Operation manual 1pc
- Damproof accessories 1pc
- Bolt bag 1pc
- Contact speed measurement fitting 1pc
- Contact rotational speed measurement fitting 3pcs