



ADC KRONE – MODULE & CONNECTORS LSA-PLUS SERIES 2



Series 2 Connection Module 2/10 (1-0), Profil

Terminates 10 incoming and 10 outgoing pairs. Pairs numbered 1-0. Contacts are permanently connected, for use with 3 point protection only. For mounting on Profil or Back-mount frames.

Part No.	Description
6089 1 120-02	LSA-Profil Connection Module 2/10



Series 2 Disconnection Module 2/10 (1-0), Profil

Disconnect Module for 10 incoming and 10 outgoing pairs. Pairs numbered 1-0. Disconnect contact used for opening the circuit. Test is possible in both directions. Can accept 3 or 5 point protection elements. For mounting on Profil or Back-mount frames.

Part No.	Description
6089 1 121-02	LSA-Profil Disconnection Module 2/10



Series 2 Connection Module 2/8 (1-8), Back-mount Frame

Terminates 8 incoming and 8 outgoing pairs. Pairs numbered 1-8. Contacts are permanently connected, for use with 3 point protection elements only. For mounting on Back-mount frames only.

Part No.	Description
6036 1 004-00	LSA-PLUS Connection Module 2/8



Series 2 Disconnection Module 2/8 (1-8), Back-mount Frame

Disconnect Module for 8 incoming and 8 outgoing pairs. Pairs numbered 1-8. Disconnect contact used for opening the circuit. Test is possible in both directions. Can accept 3 or 5 point protection elements. For mounting on Back-mount frames only.


Part No.	Description
6036 1 005-00	LSA-PLUS Disconnection Module 2/8



Profil Instrumentation Disconnect Module 2/10

For terminating large diameter instrumentation wires (0.65-0.90mm) and 1.65-2.05 mm insulation. Marking numbers 1-0. 10-pair, 20 wire position. Blue print (1-0). Versions with or without jumper rings. For mounting on Profil, Back-mount frames or 35 mm DIN-rail (using Adaptors).


Part No.	Description
6468 5 049-10	LSA-Profil Instrumentation Disconnection Module 2/10
6468 5 050-10	LSA-Profil Instrumentation Interface Modules 2/10

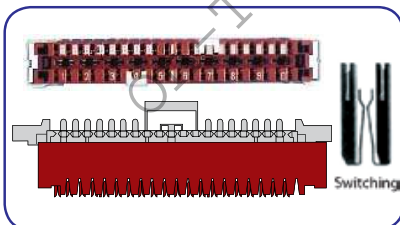

Series 2, LSA-Profil Switching Module 2/10

Depending on application, for switching up to 16 pairs (or 20 pairs for 2/10). The overall diameter of the single wires can range from 0.7mm to 1.6 mm. For mounting on Profil, Back-mount frames.

Part No.	Description
6089 1 126-00	LSA-Profil Switching Module 2/10

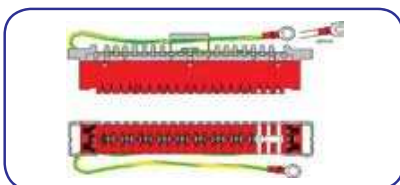

Series 2, LSA-Profil Earth Module

For connecting drain wires to earth contact without soldering, wire stripping or the used of screws. 34 contacts are available for termination. For mounting on Profil or Back-mount frames.

Part No.	Description
6089 2 017-01	Earth Modules 2/10 earth 2/38, 250 mm cable.