

แม่แรงไฮดรอลิคยกรถ Garage Jacks Manual Type



- These are high quality long selling products of a compact design.
- These jacks have become favourites in maintenance shops and gas stations throughout the world.




Specs.	Max. Usage Load (ton)	a Min. Socket Heigh (mm)	b Max. Socket Heigh (mm)	Stroke (mm)	c Frame Height (mm)	d Fixed Wheel Total Width (mm)	e Total Width (mm)	f Total Length (mm)	Handle Length (mm)	Gross mass (kg)	Required Oil (cc)	Notes
SJ-15H-3	1.5	113	473	360	150	250	350	655	1,044	33	260	
SJ-20S-3	2	113	473	360	150	250	350	655	1,044	33	260	
SJ-20L-2	2	116	476	360	160	260	350	920	1,044	45	260	
SJ-20LL-2	2	98	508	410	120	282	380	961	940	57	350	Low floor Pedal fixture
SJ-30H	3	126	606	480	190	244	325	1,310	1,070	65	400	Pedal fixture
SJ-30LL	3	98	613	515	135	274	361	1,367	1,070	80	440	Low floor Pedal fixture
SJ-50H	5	150	560	410	200	285	365	1,415	1,070	85	310	Pedal fixture
SJ-100H	10	160	560	400	250	325	495	1,545	1,070	135	630	Pedal fixture

Max. Usage Load (Lifting Load)
The max. usage load in the specifications shows the lifting load when the socket is raised to a location half the lifting height. When the socket is at a location lower than half the lifting height, the max. usage load becomes smaller. (JIS standard)

แม่แรงไฮดรอลิคยกรถ (วัสดุเป็นอลูมิเนียม) Aluminum Garage Jacks Manual Type

- These jacks are convenient to carry as a light-weight jack.
- Useful for offsite use or in race competitions, etc. due to their light Weight and compact size.

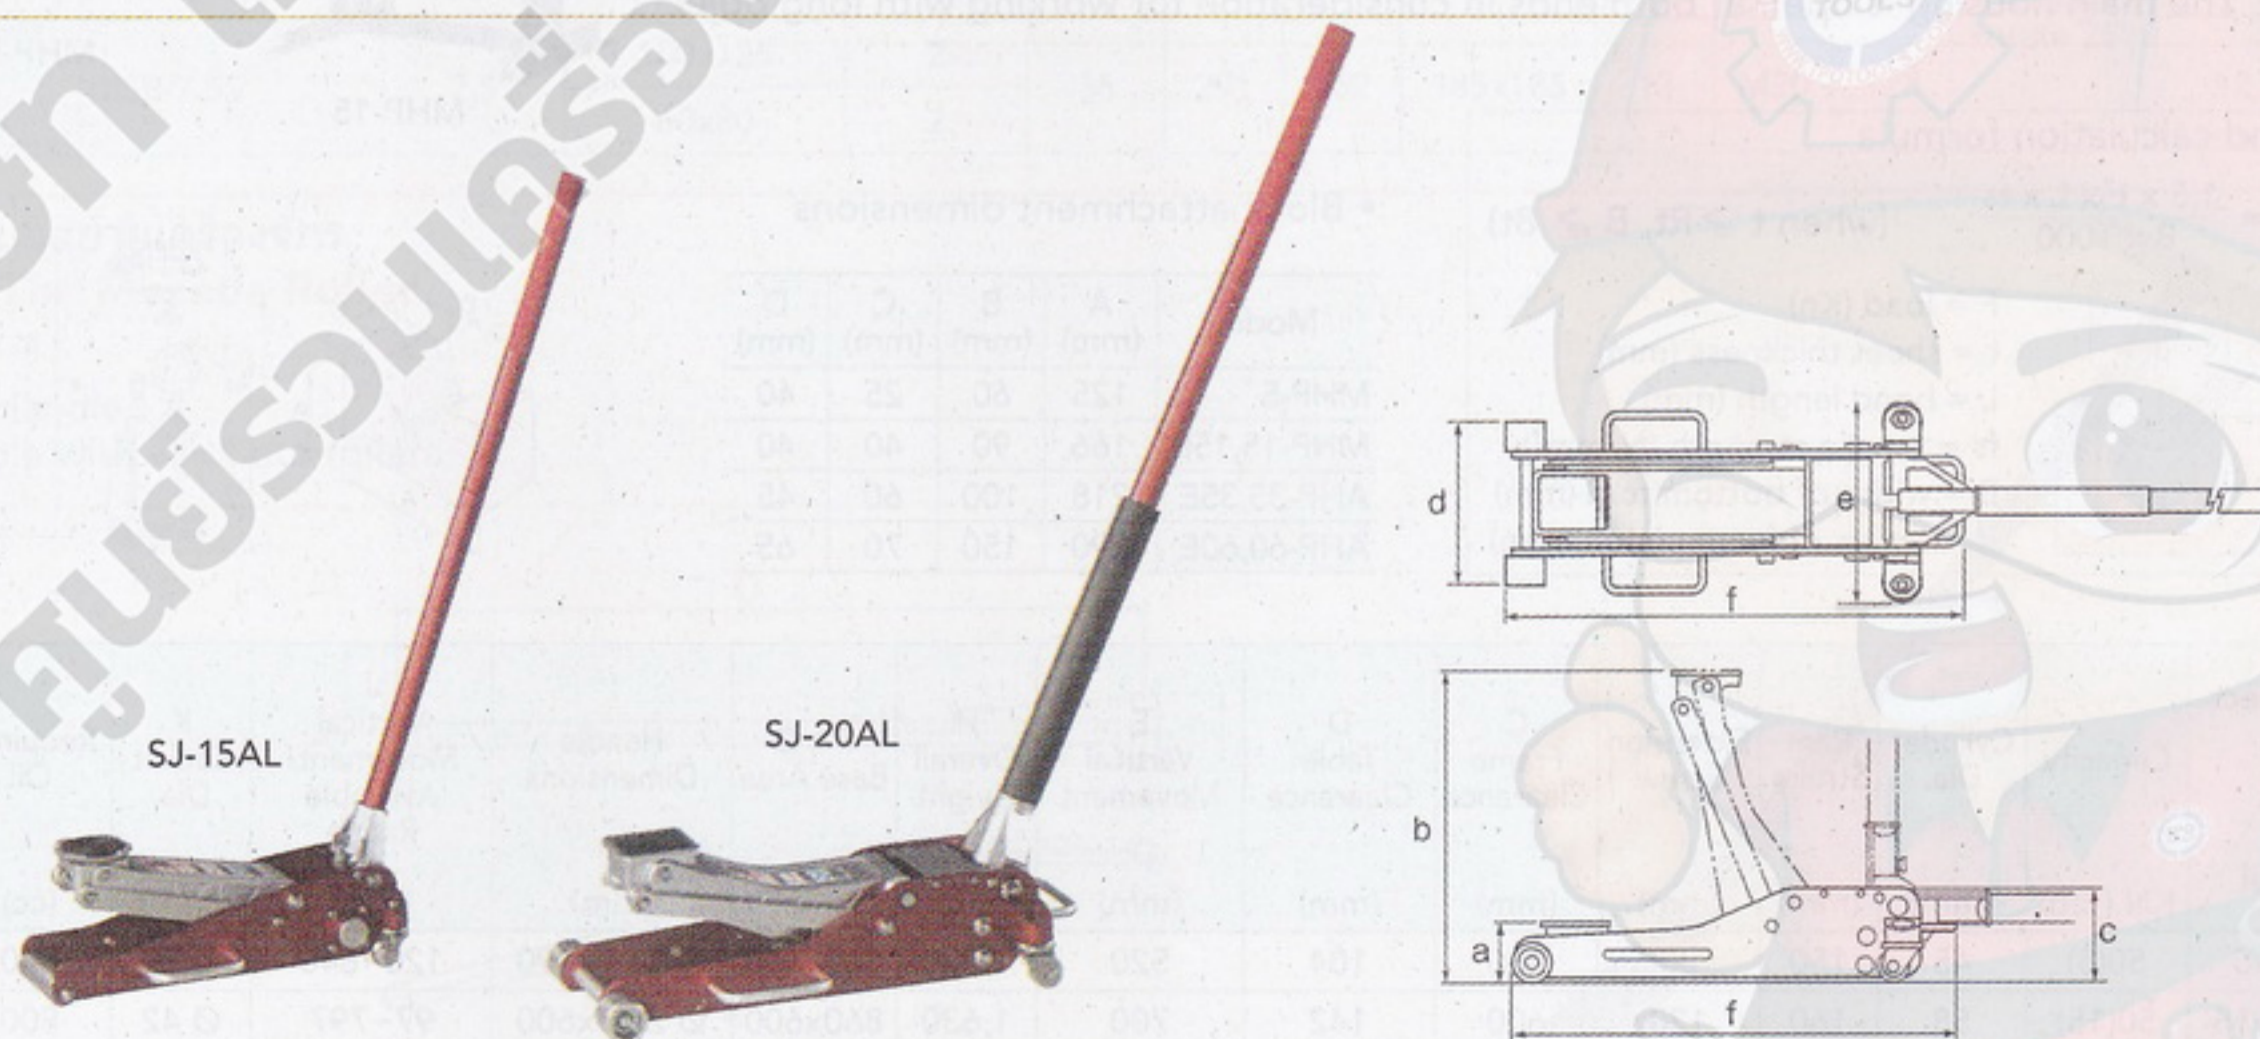

Specs.	Max. Usage Load (ton)	a Min. Socket Height (mm)	Stroke (mm)	b Max. Socket Height (mm)	c Frame Height (mm)	d Fixed Wheel Total Width (mm)	e Total Width (mm)	f Total Length (mm)	Handle Length (mm)	Gross mass (kg)
SJ-15AL	1.5	79	300	379	130	170	242	503	957	10.7
SJ-20AL	2	86	383	469	155	285	320	697	1,210	20.4

